CDP-C10

SERVICE MANUAL

US Model
Canadian Model
AEP Model
UK Model
E Model

PRELIMINARY

SPECIFICATIONS

COMPACT DISC PLAYER CDP-C10

System — Compact disc digital audio system
Frequency response — 2 Hz – 20,000 Hz ($^{+0.5}_{-1.5}$ dB)
Signal to noise ratio — More than 98 dB
Dynamic range — More than 95 dB
Harmonic distortion — Less than 0.003% (at 1 kHz)
Channel separation — More than 90 dB
Wow and flutter — Below measurable limit
Outputs — Fixed line outputs (phono jacks)
Output level 2 Vrms (at MSB)
Load impedance over 10 kilohms
Variable line outputs (phono jacks)
Output level 0 Vrms – 2 V rms (at MSB)
Load impedance over 50 kilohms
Headphones (phone jack)
28 mW at 32 ohms

General

Power requirements
Model for European countries:
220 V AC, 50 Hz
Model for United Kingdom:
240 V AC, 50 Hz
Model for other countries:
120, 220 or 240 V AC adjustable, 50/60 Hz
Power consumption — 17 W
Dimensions — Approx. 430 × 115 × 340 mm (w/h/d) ($17 \times 4^5/_8 \times 13^1/_2$ inches) incl. projecting parts and controls
Weight — Approx. 7.5 kg (16 lbs 9 oz), net

REMOTE COMMANDER RM-D110

Remote control system — Infrared control
Power requirements — 3 V dc with two batteries size AA (IEC designation R6)
Dimensions — Approx. 67 × 20 × 175 mm (w/h/d) ($2^3/_4 \times {}^{13}/_{16} \times 7$ inches) incl. projecting parts and controls
Weight — Approx. 145 g (5.1 oz) incl. batteries

Note

This appliance conforms with EEC Directives 76/889 and 82/499 regarding interference suppression.

SUPPLIED ACCESSORIES

Audio signal connecting cord (phono plug × 2 ⟷ phono plug × 2) (1)
Remote commander (1)
Disc magazine (1)
CD booklet holder (1)
Sony New Super batteries SUM-3 (NS) (2)

Design and specifications subject to change without notice.

MICROFILM

COMPACT DISC PLAYER
SONY®

AUD

SECTION 1
DIAGRAMS

1-1. MOUNTING DIAGRAMS
— POWER —

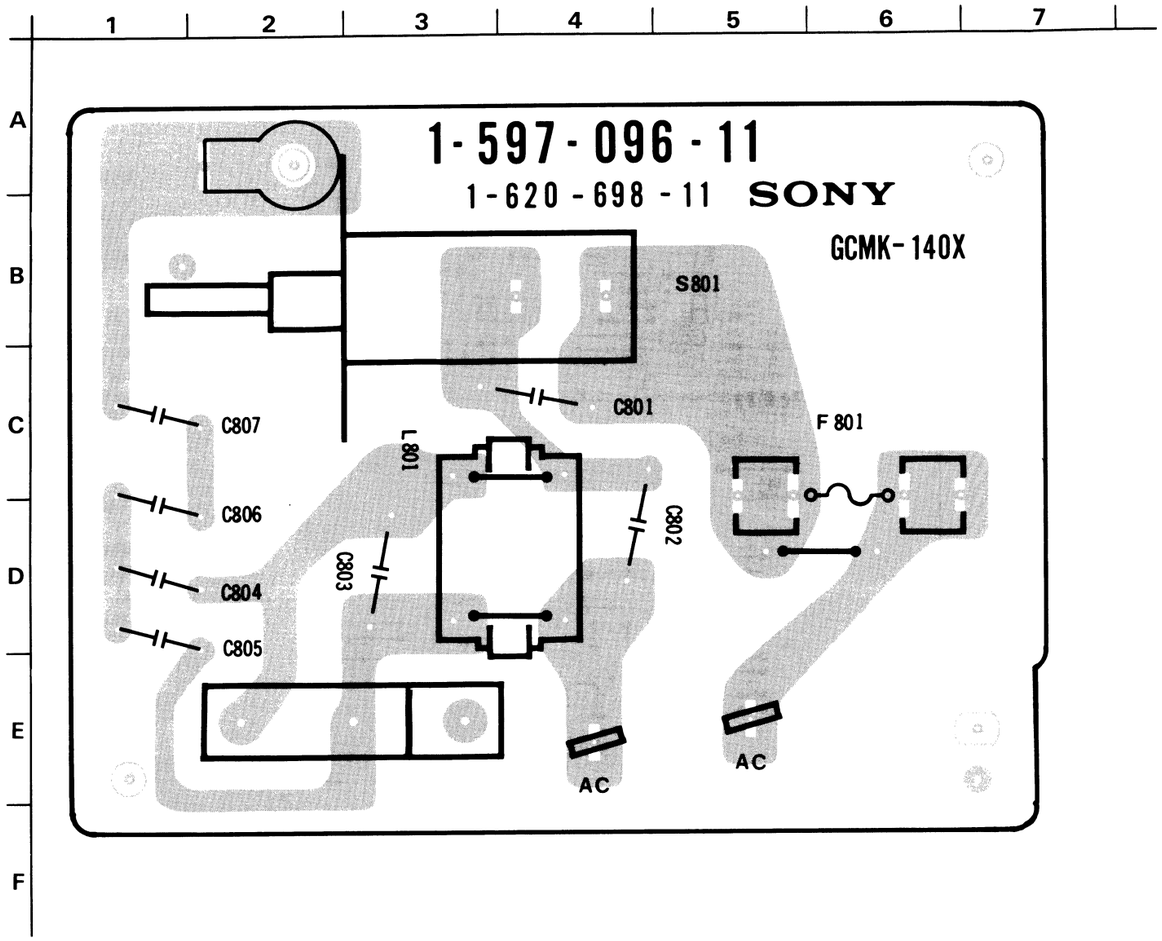

1-2. MOUNTING DIAGRAM
– MAIN –

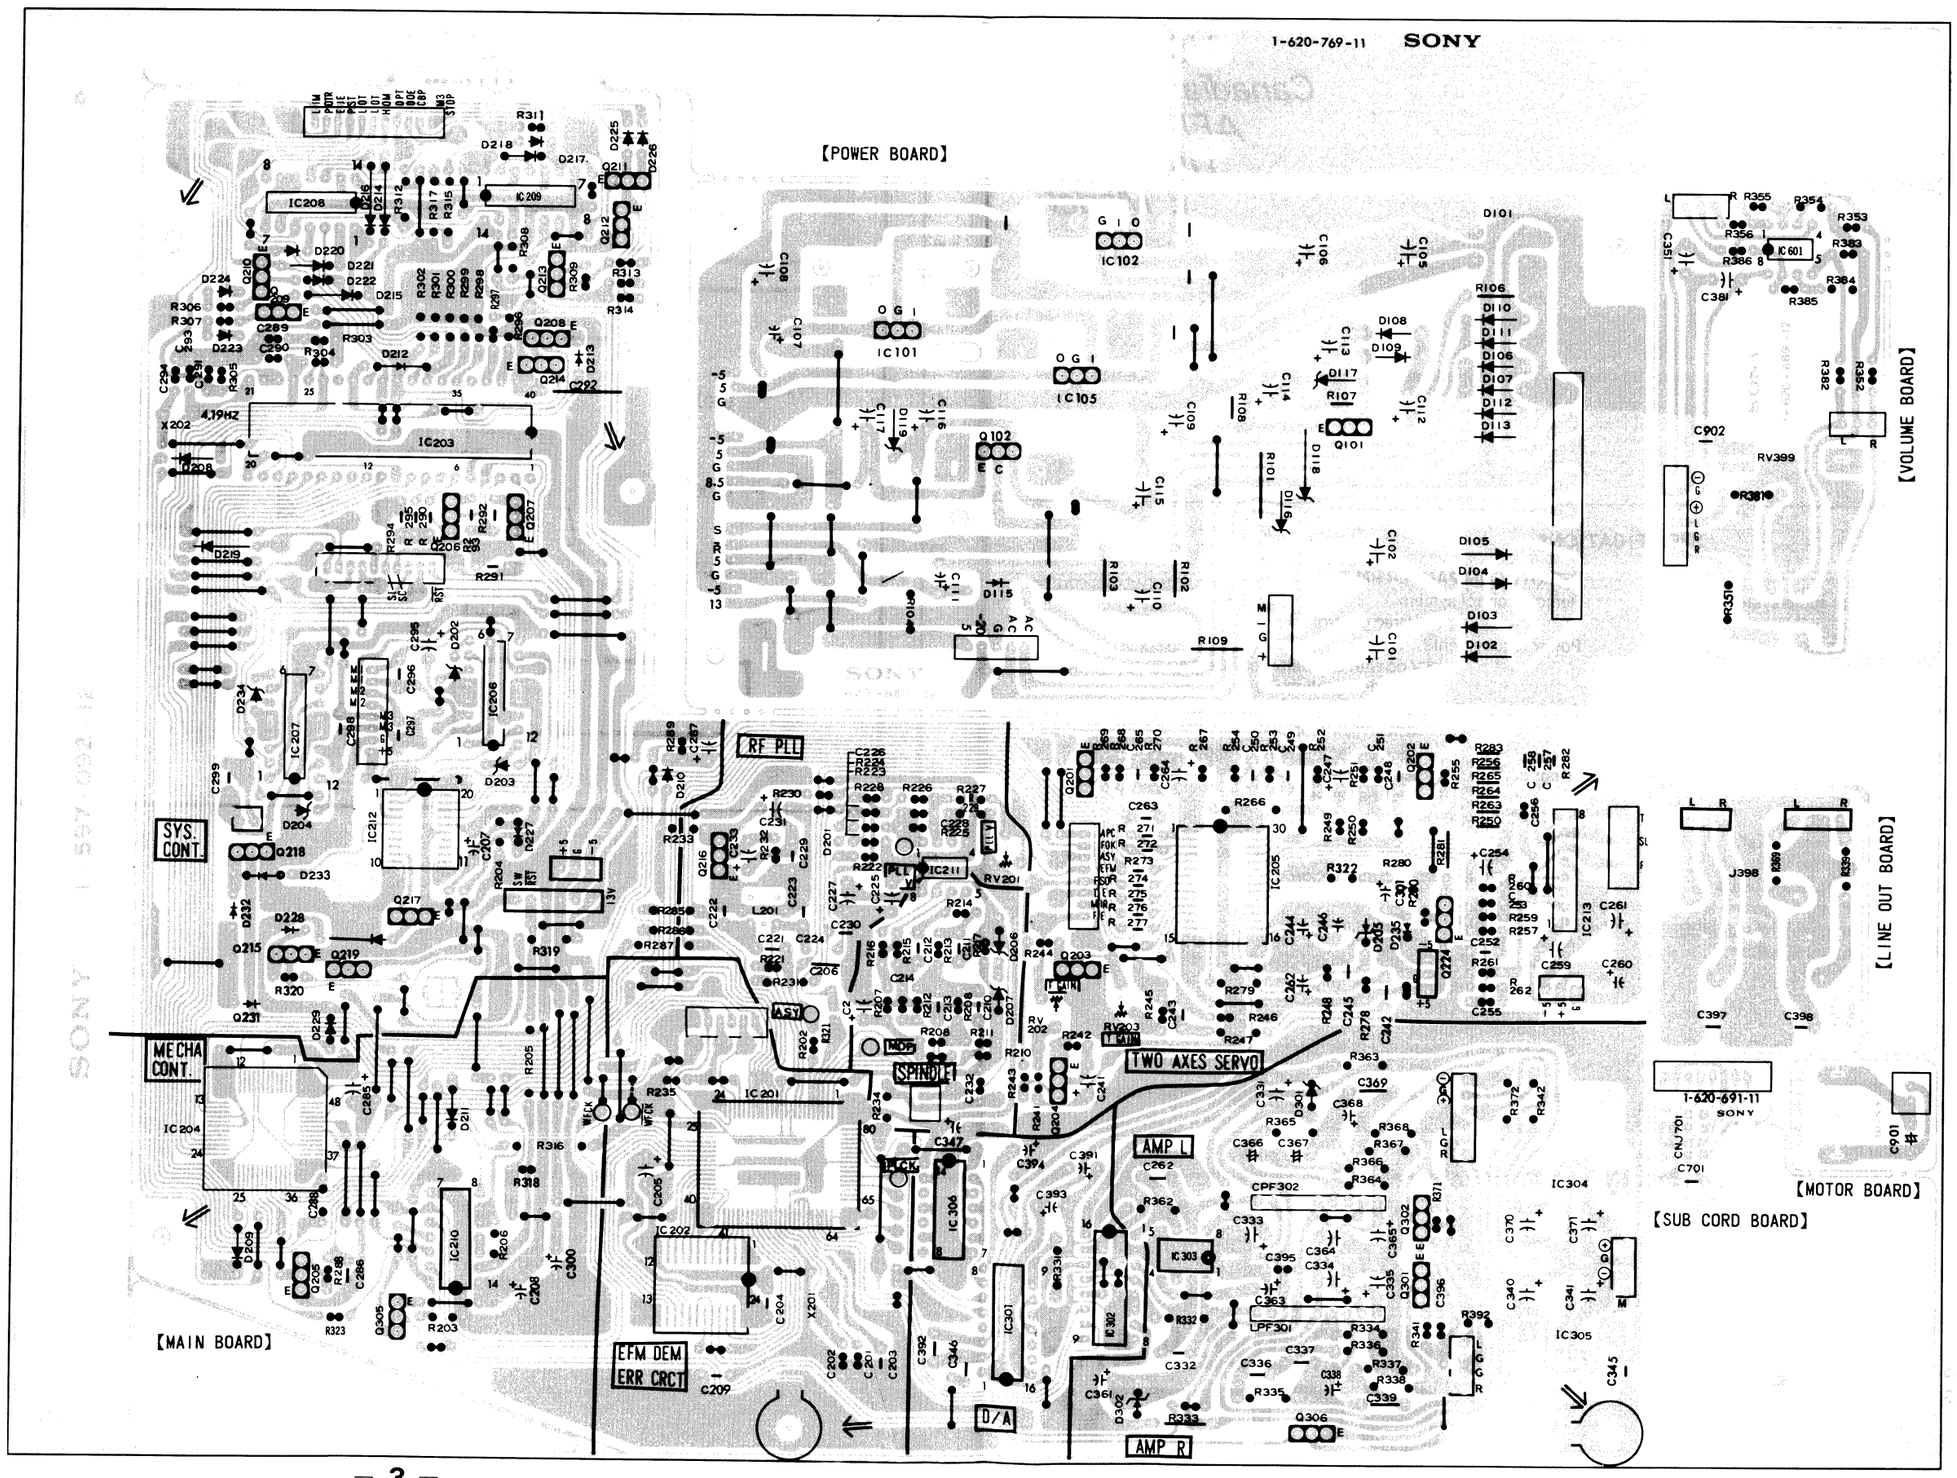

1-3. SCHEMATIC DIAGRAMS
– MAIN –

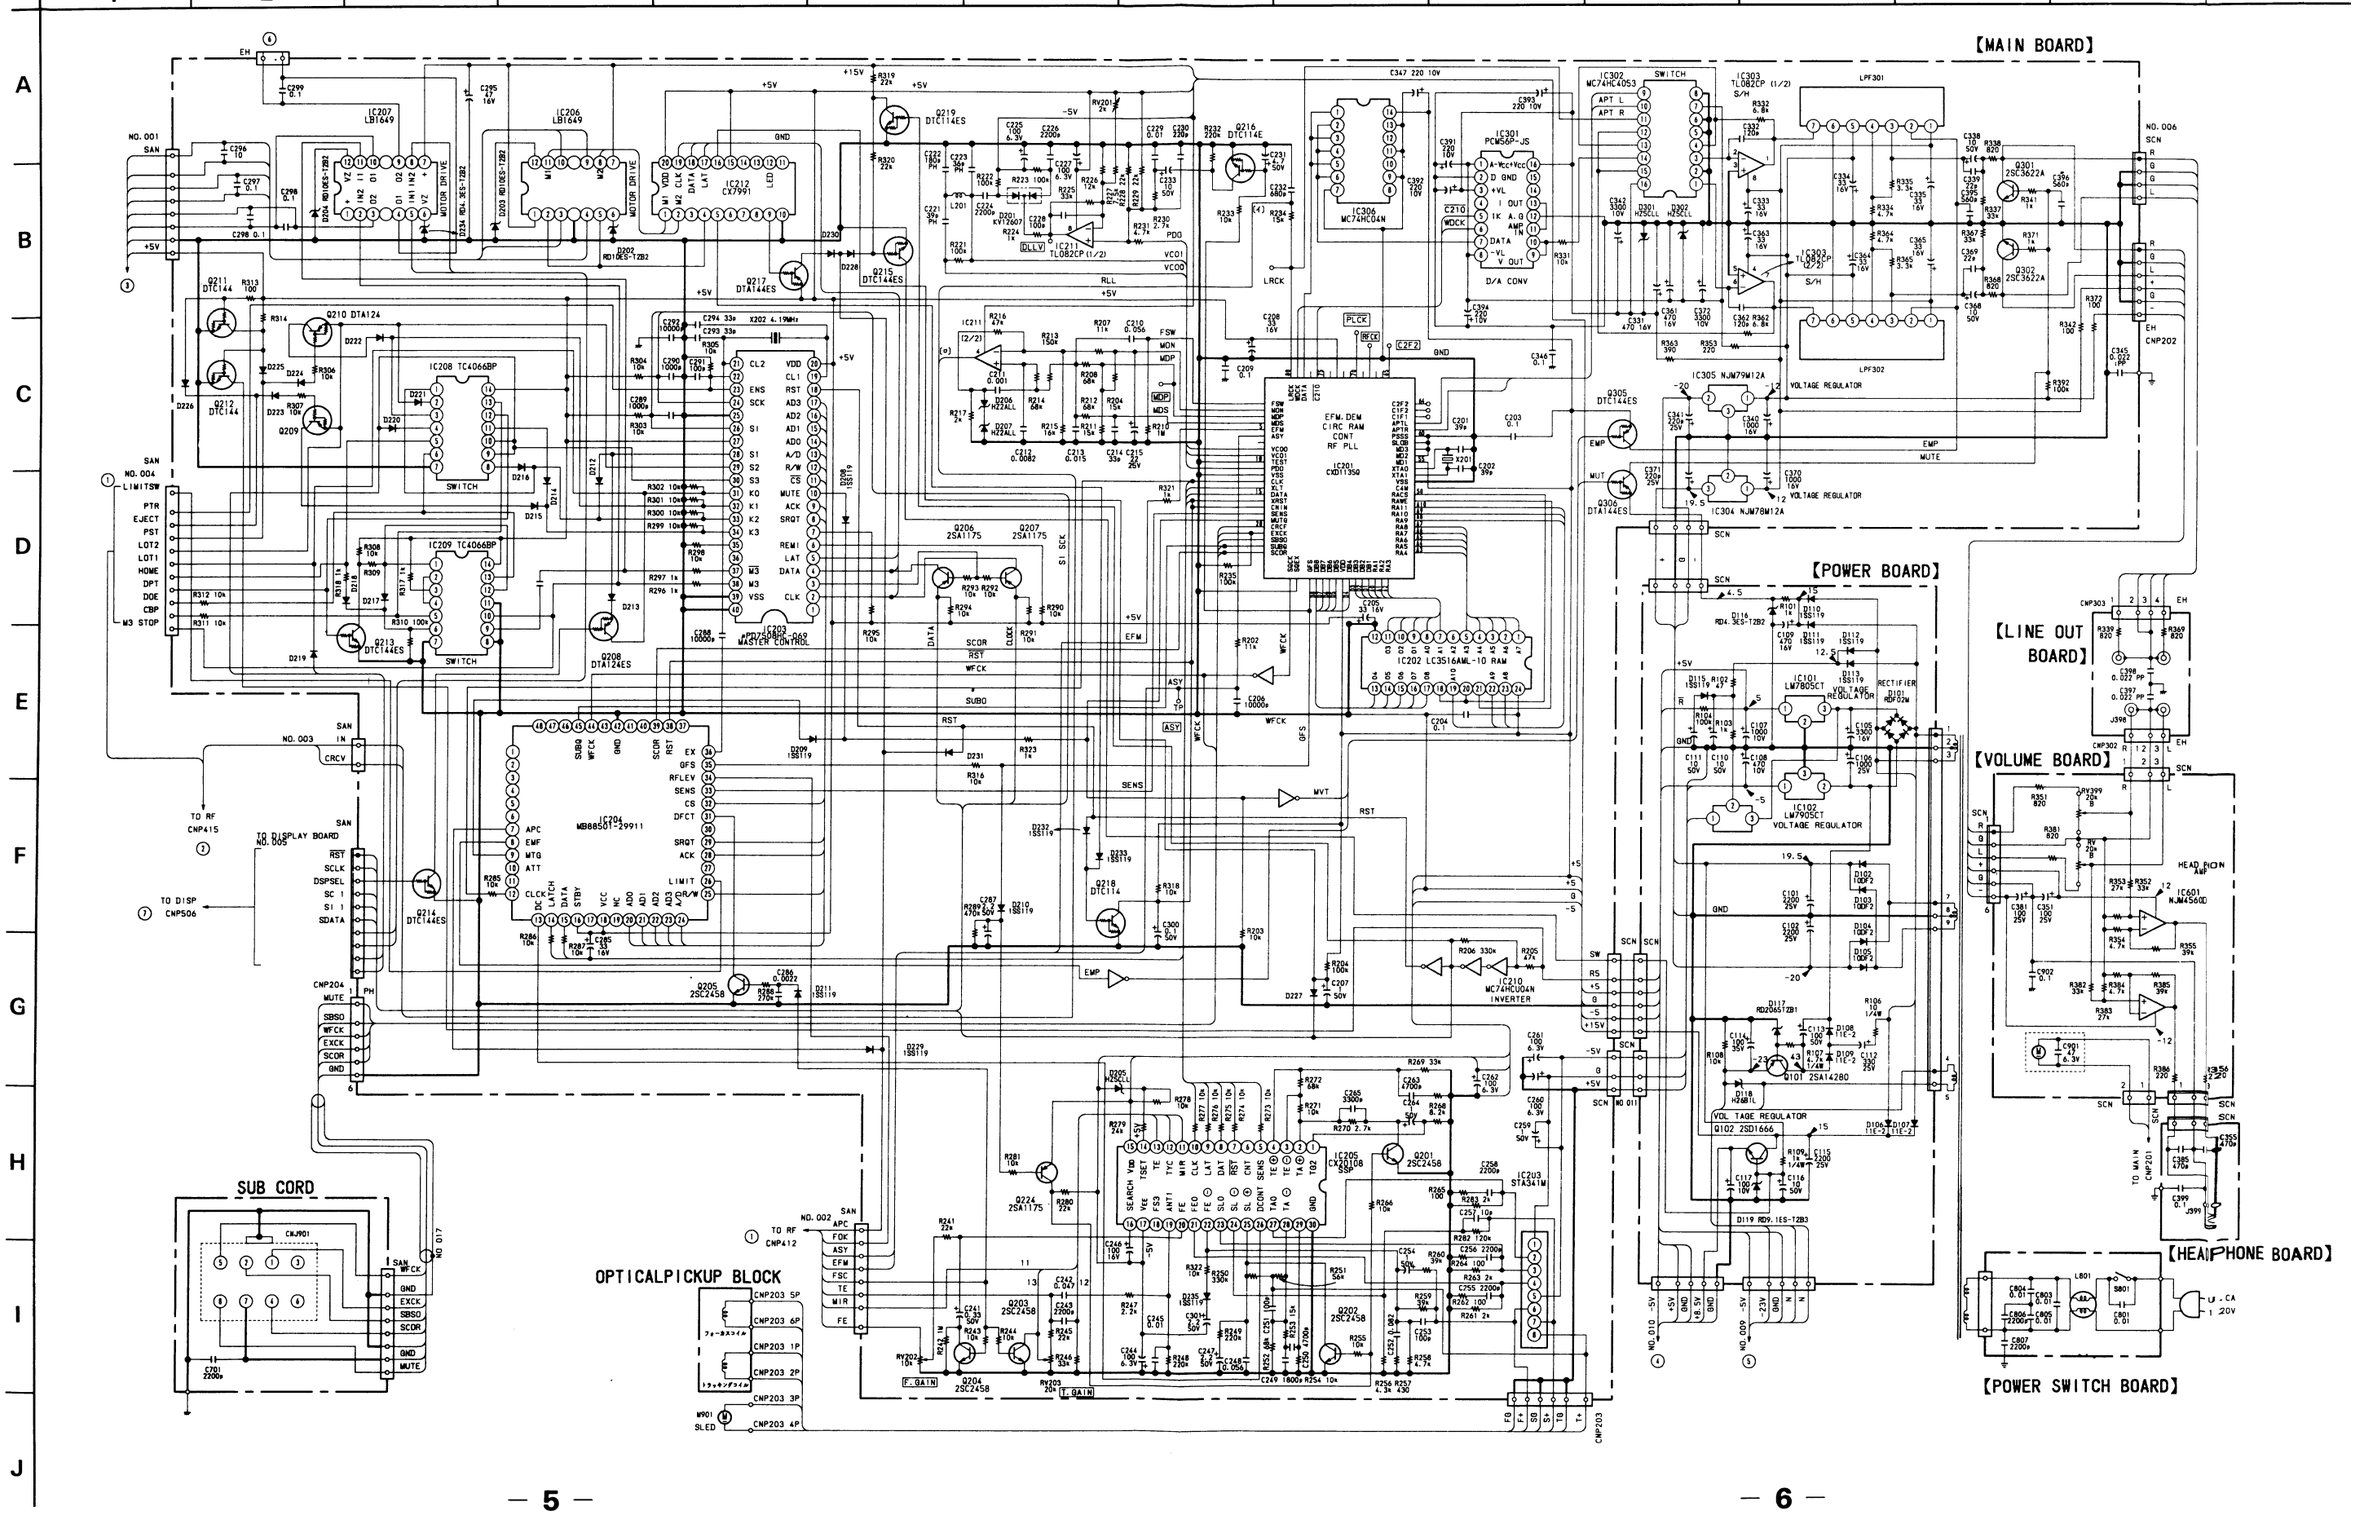

1-4. SCHEMATIC DIAGRAM
– RF –

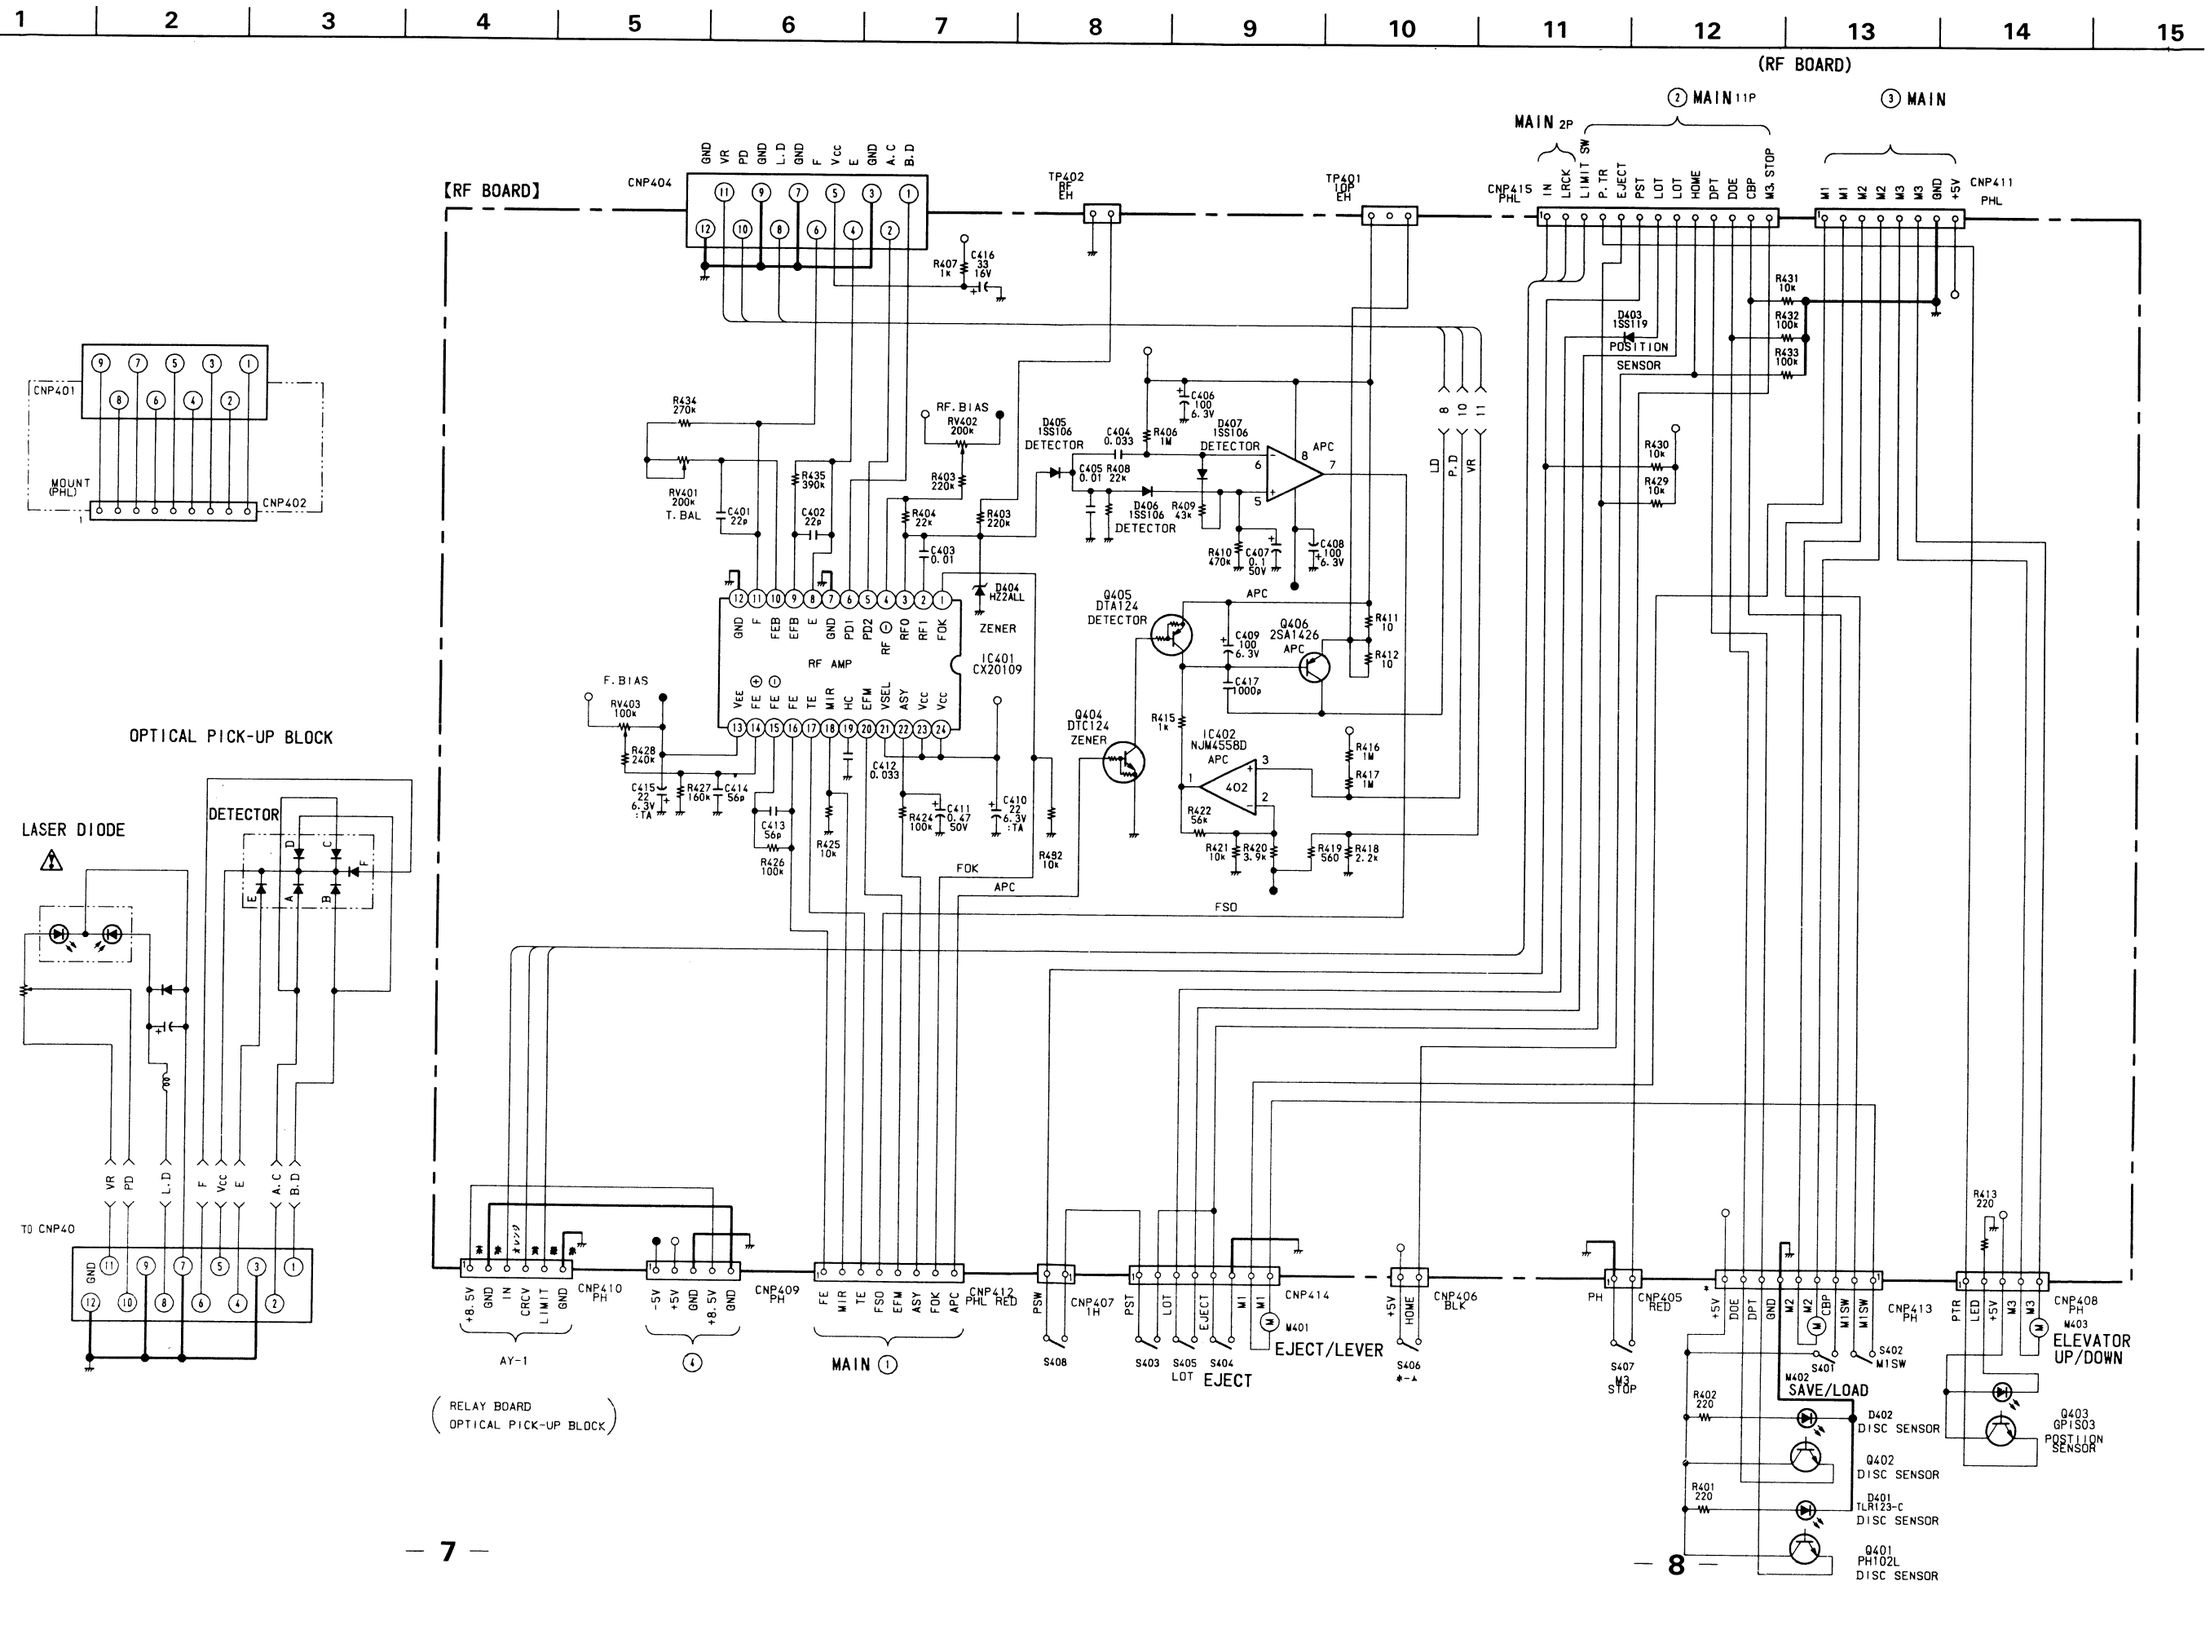

1-5. MOUNTING DIAGRAM

– RF –

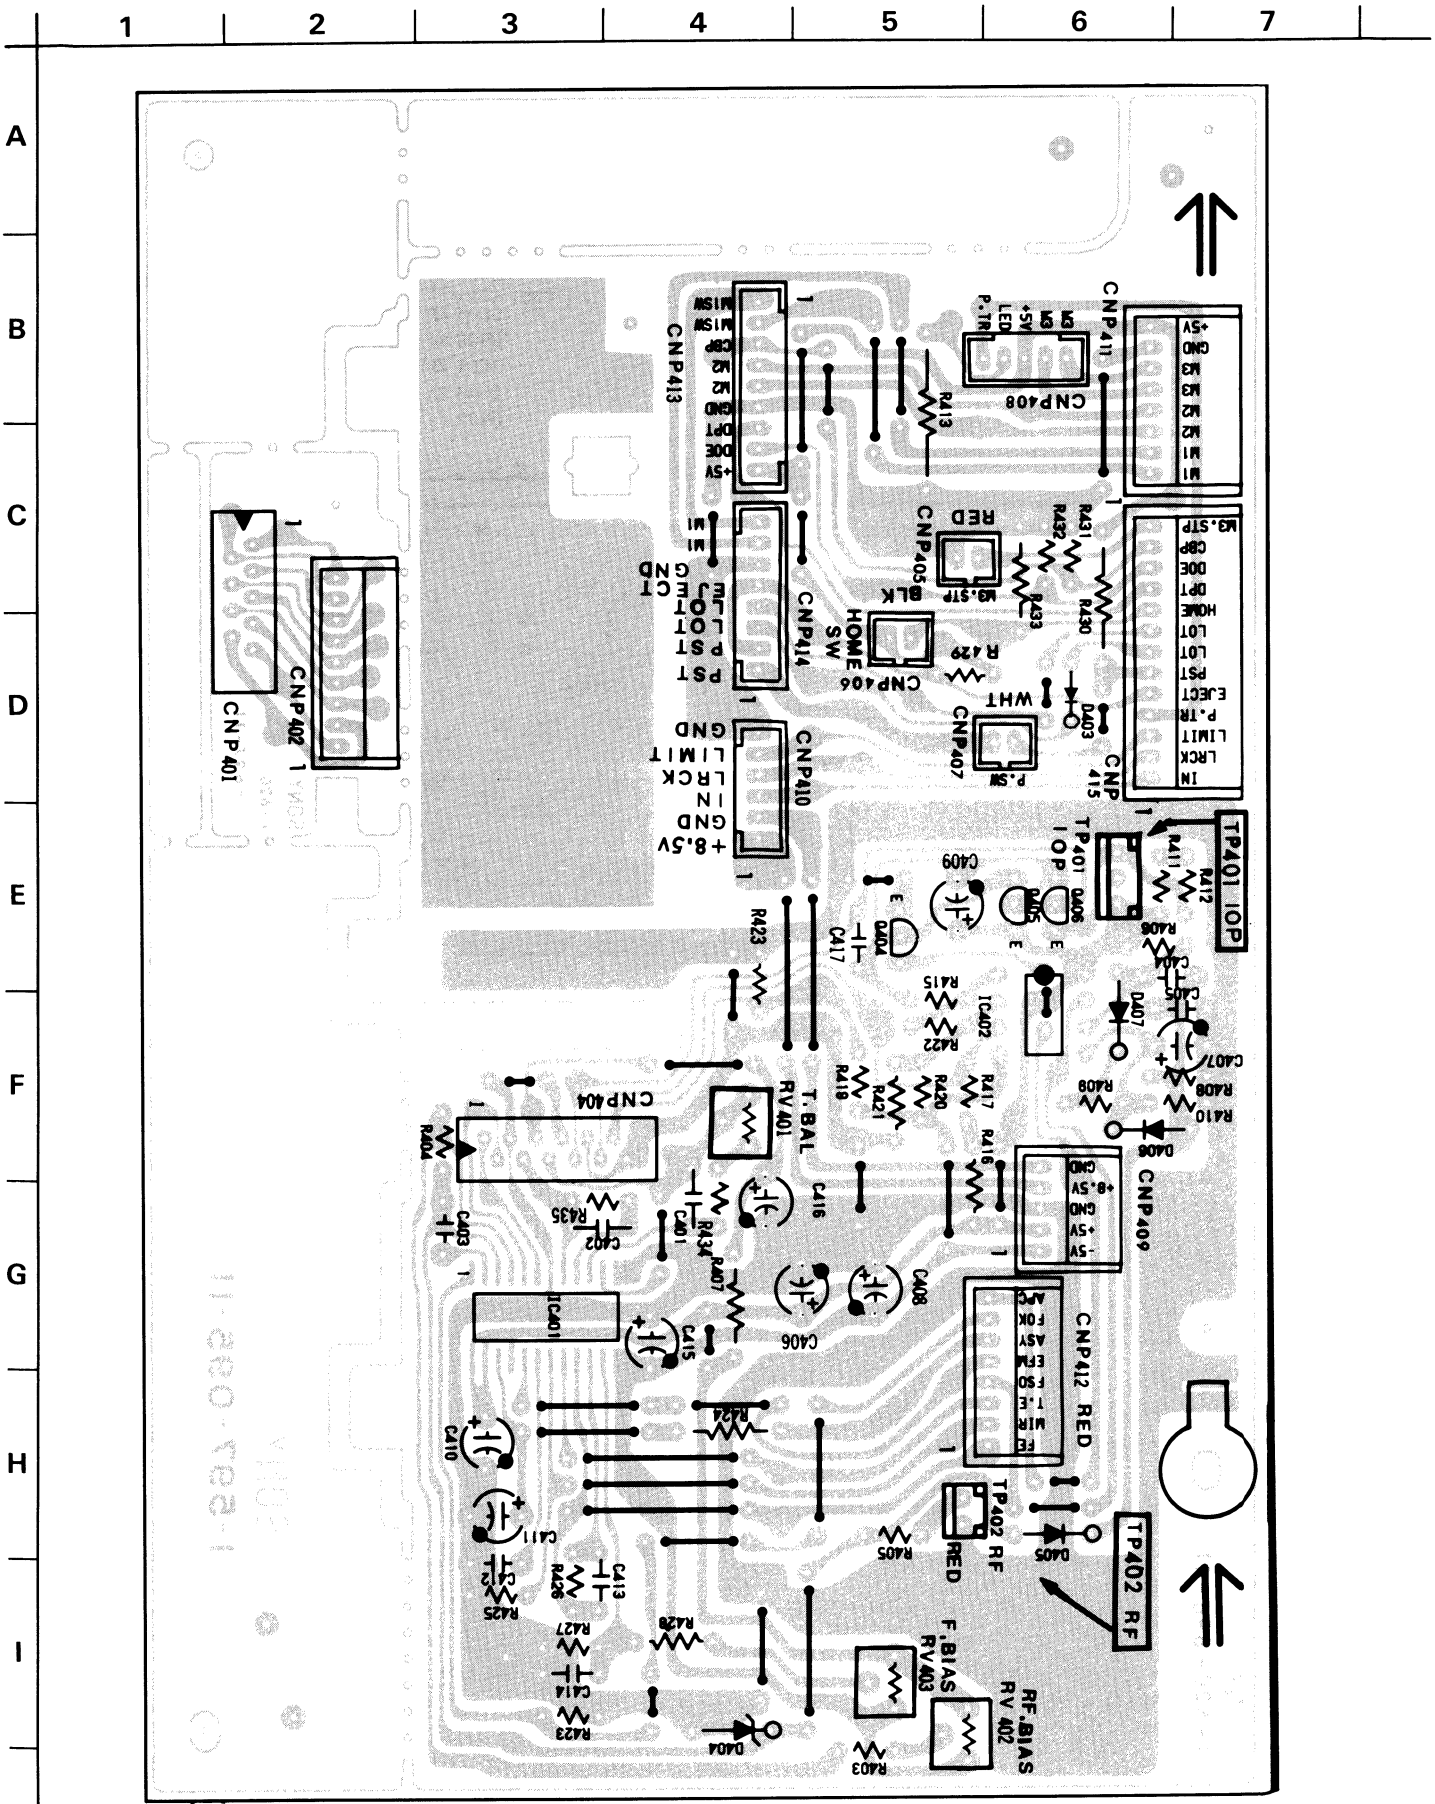

1-6. MOUNTING DIAGRAM
– DISPLAY –

【DISPLAY BOARD】

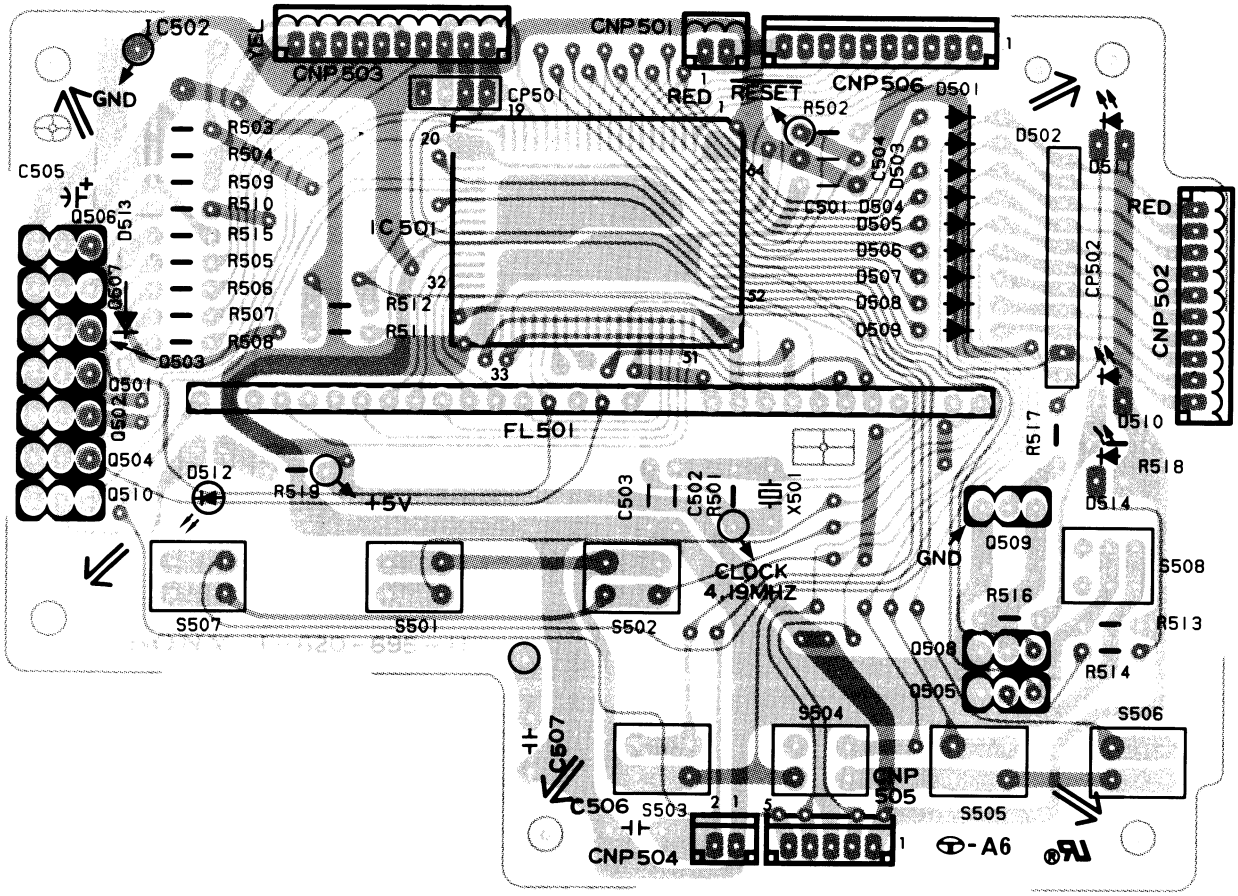

1-7. SCHEMATIC DIAGRAM
– – DISPLAY –

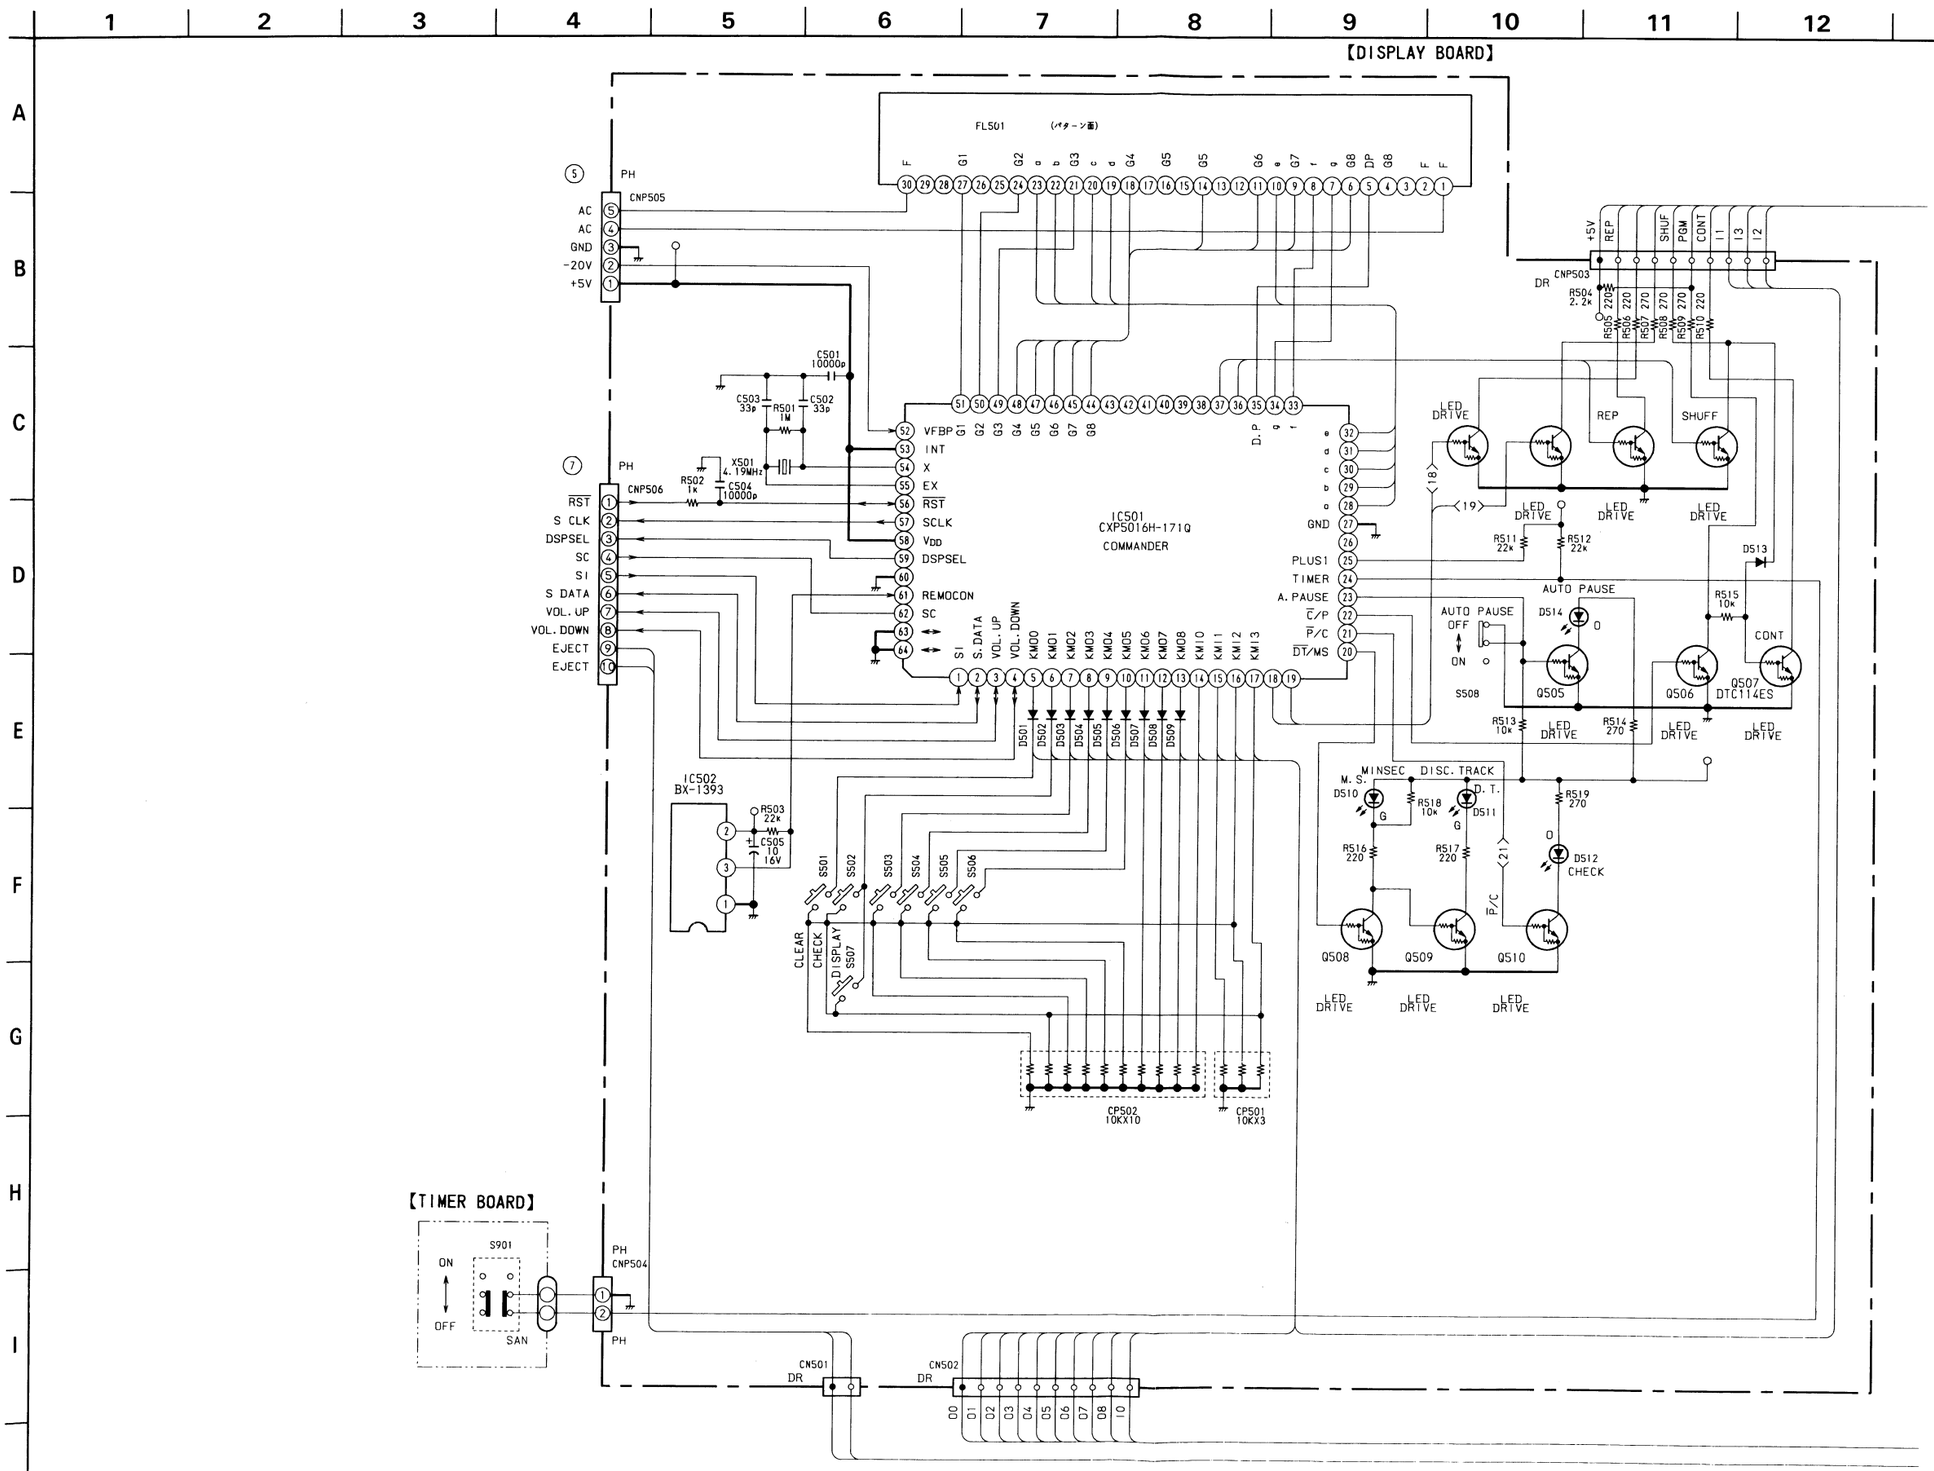

1-9. SCHEMATIC DIAGRAM – FUNCTION –

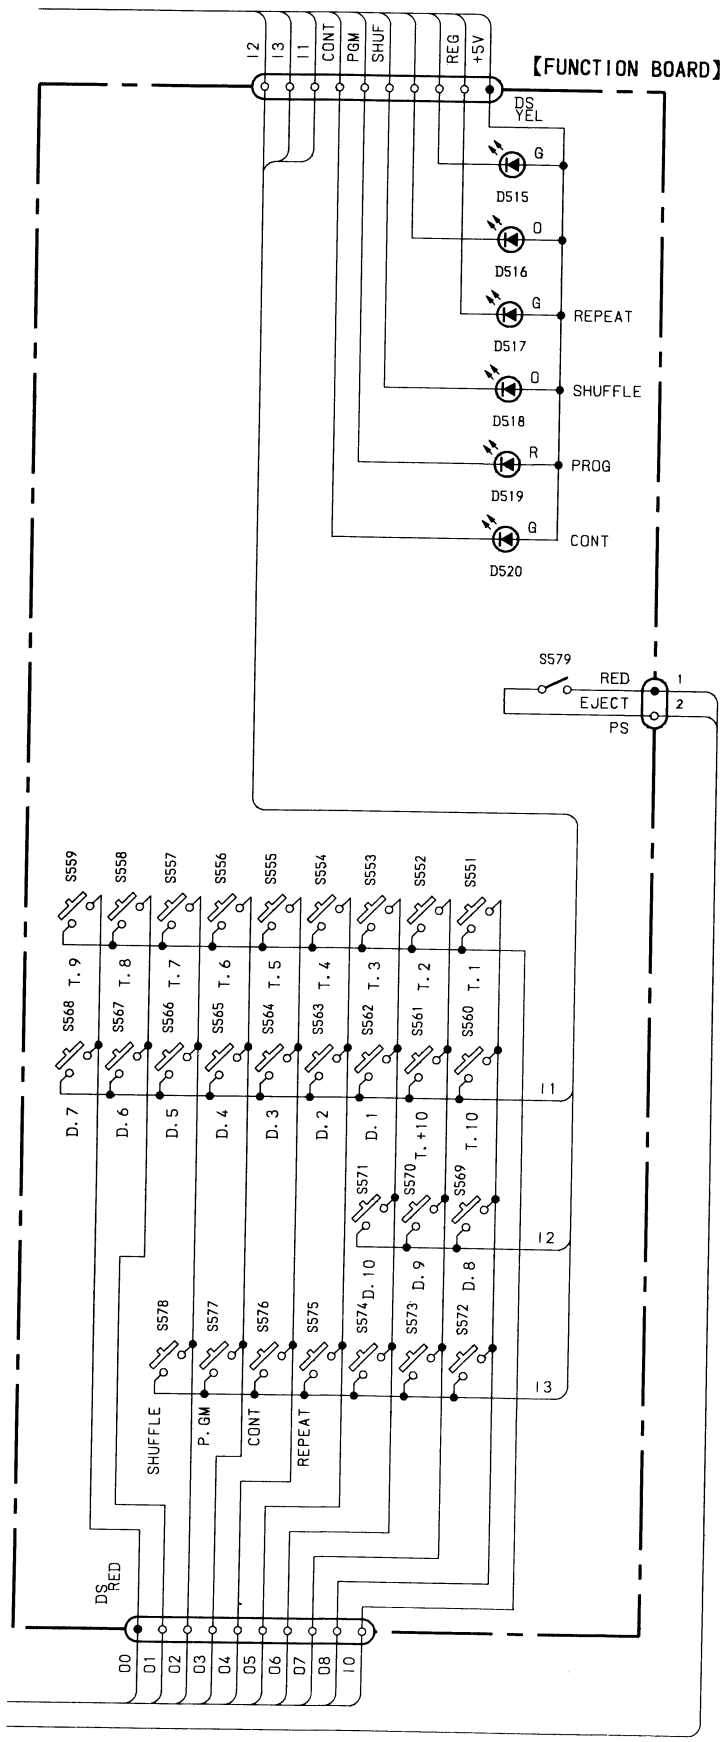

1-10. MOUNTING DIAGRAM – FUNCTION –

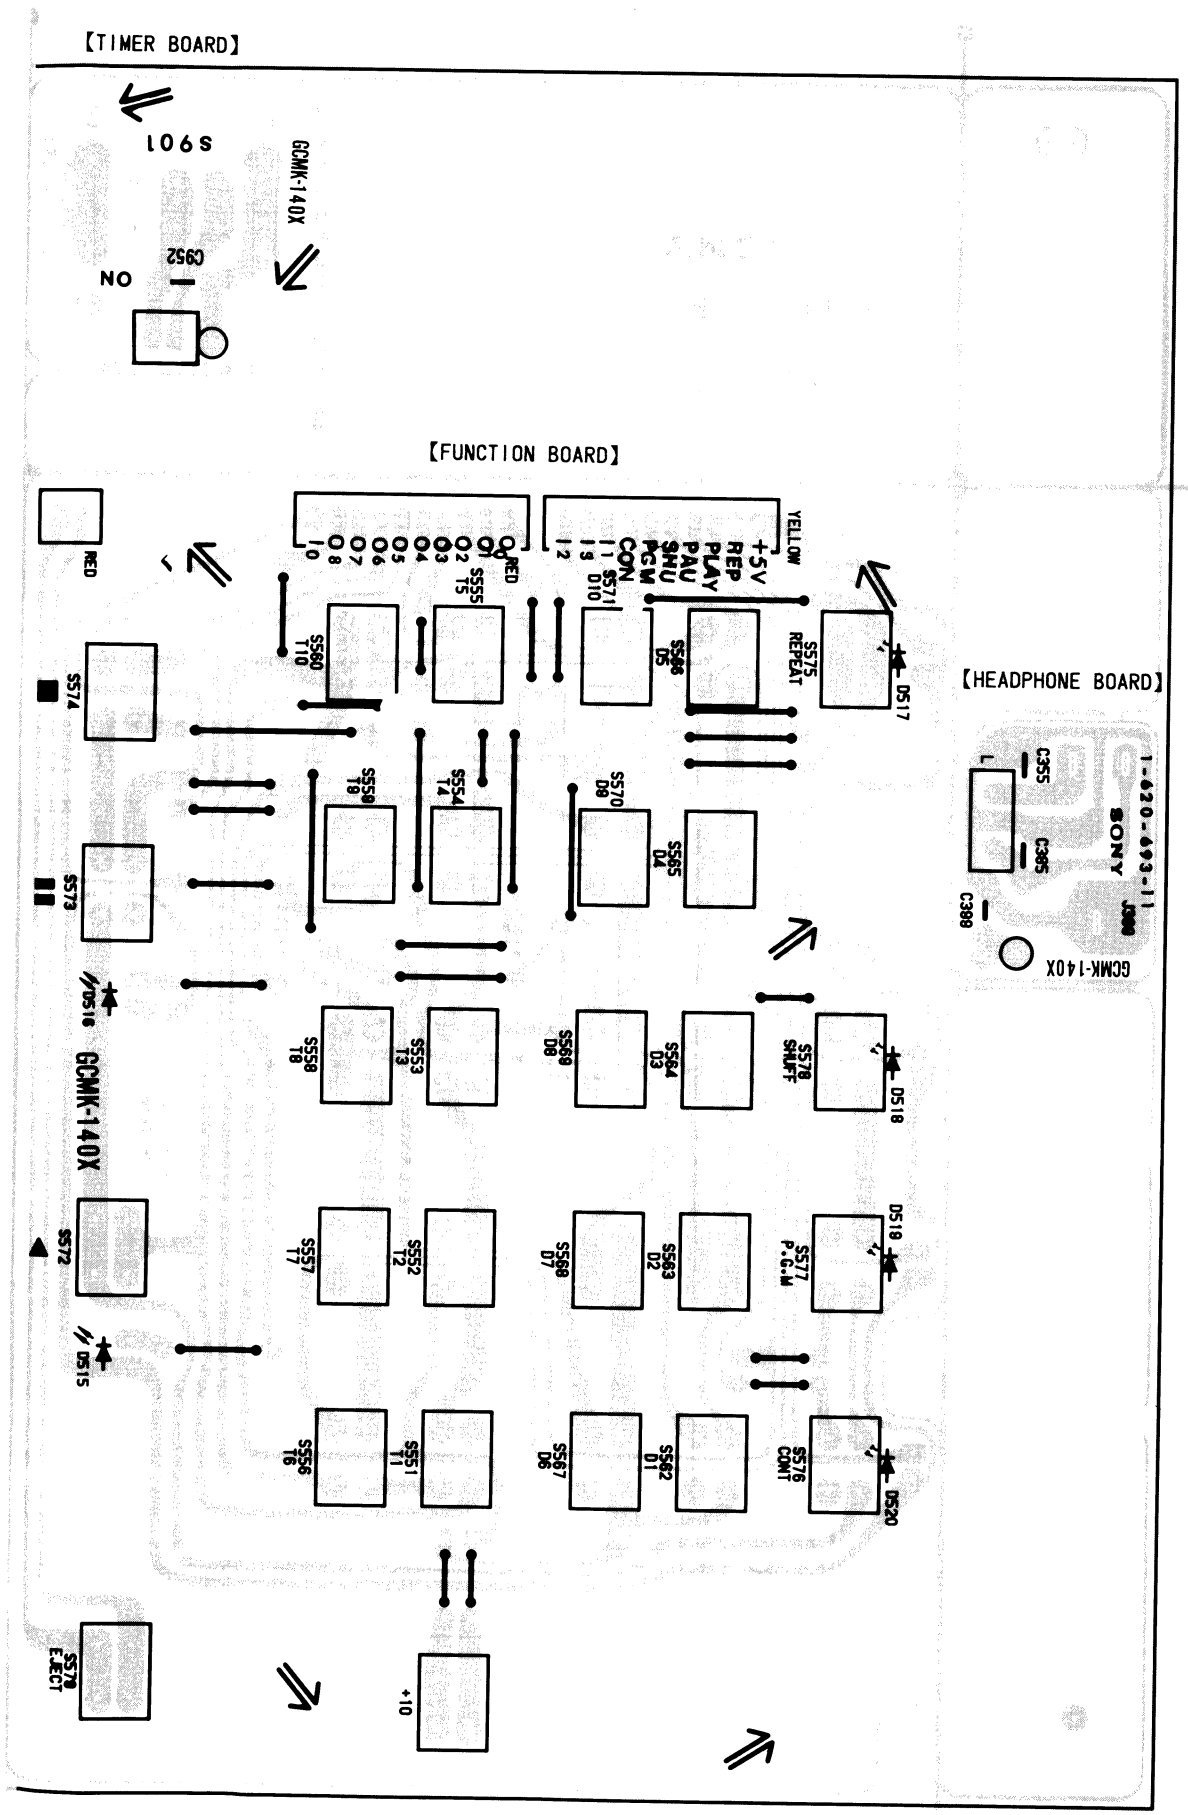

SECTION 2

EXPLODED VIEWS AND PARTS LIST

NOTE:
- The mechanical parts with no reference number in the exploded views are not supplied.
- Items marked " * " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- The construction parts of an assembled part are indicated with a collation number in the remark column.
- Color Indication of Appearance Parts
  Example: (RED) ..... KNOB, BALANCE (WHITE)
  (RED) = Cabinet's Color; (WHITE) = Parts' Color

The components identified by shading and mark ⚠ are critical for safety. Replace only with part number specified.

(1)

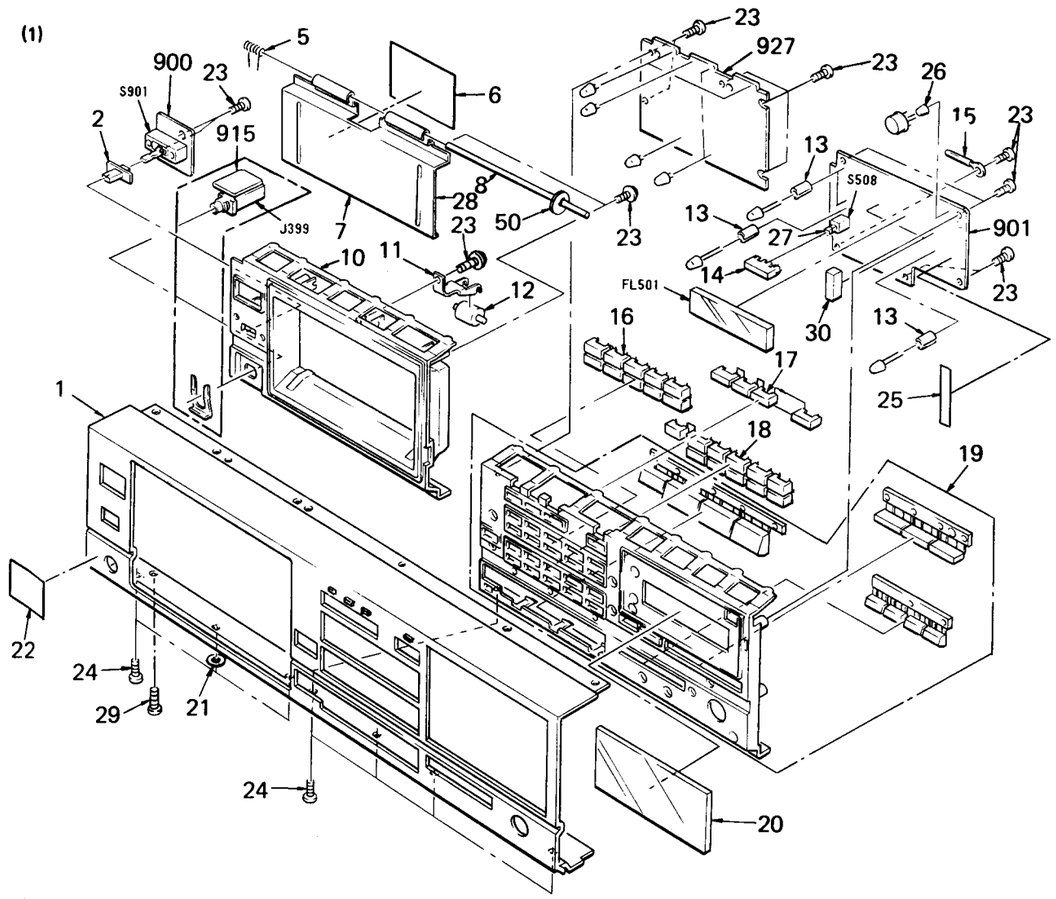

No.	Part No.	Description	Remarks
1	A-4636-217-A	PANEL ASSY, FRONT	
2	4-887-131-00	KNOB, SLIDE SWITCH	
5	3-331-931-01	SPRING	
7	*4-917-487-01	DUMPER (P)	
8	*4-917-450-01	SHAFT, PACK DOOR	
9	4-917-457-01	DOOR, PACK	
10	4-917-474-01	ESCUTCHEON	
11	*4-917-449-01	LEVER, PACK RETAINER	
12	*X-4917-410-1	ROLLER ASSY, PACK	
13	*4-911-676-01	SPACER, LED	
14	4-917-463-01	BUTTON, AP	
16	4-917-462-11	BUTTON, SELECT	
17	4-917-461-01	BUTTON, MODE	
18	4-917-462-01	BUTTON, SELECT	
19	A-4675-161-A	BASE ASSY, BUTTON	
20	4-912-926-01	INDICATE BOARD	
21	3-423-147-11	SPACER (DIA.6)	
22	3-703-710-41	STICKER, SONY SYMBOL (12)	
23	7-685-534-19	SCREW +BTP 2.6X8 TYPE2 N-S	
24	7-685-646-71	SCREW +BVTP 3X8 TYPE2 N-S	
25	*4-917-499-01	CUSHION (SELECT)	
26	*4-917-443-01	SPACER, REMOTE CONTROL	
27	*4-918-701-01	SPACER (AP)	
28	*4-917-488-01	CUSHION (P)	
29	7-685-146-19	SCREW +BVTP 3X8, TYPE2	
30	*4-917-485-01	SPACER, FL TUBE	
50	3-701-437-11	WASHER	
900	*1-620-694-11	PC BOARD, TIMER	
901	*A-4657-032-A	MOUNTED PCB, DISPLAY	
915	*1-620-693-11	PC BOARD, HEADPHONE	
927	*1-620-692-11	PC BOARD, FUNCTION	

(2)

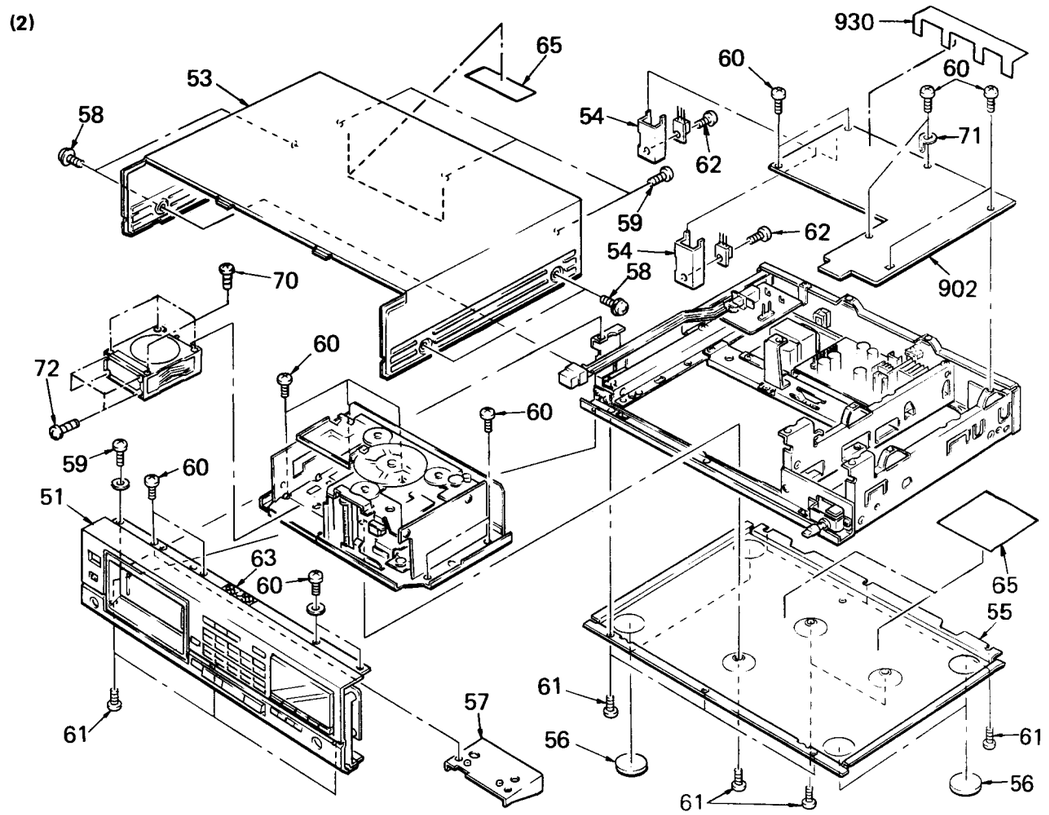

No.	Part No.	Description	Remarks
53	4-917-476-01	CASE	
54	*3-309-144-01	HEAT SINK	
55	*4-917-477-01	PLATE, BOTTOM	
56	4-917-453-01	FOOT	
57	*4-917-464-01	STOPPER, DOOR	
58	4-886-821-01	SCREW, M3 CASE	
59	7-685-751-09	SCREW +BVTT 3X6 (S)	
60	7-685-871-01	SCREW +BVTT 3X6 (S)	
61	3-703-108-21	SCREW +BV 3X6, S TIGHT	
62	2-259-121-00	SCREW, TR	
63	*4-917-495-01	CUSHION (CASE)	
65	*4-913-952-01	DUMPER (A)	
66	*4-913-953-01	DUMPER (B)	
70	7-685-103-14	SCREW +P 2X5 TYPE2 N-S	
71	4-870-539-00	PLATE, GROUND	
902	*A-4651-095-A	MOUNTED PCB, MAIN	
926	*1-560-242-21	BUS BAR 4P	

(3)

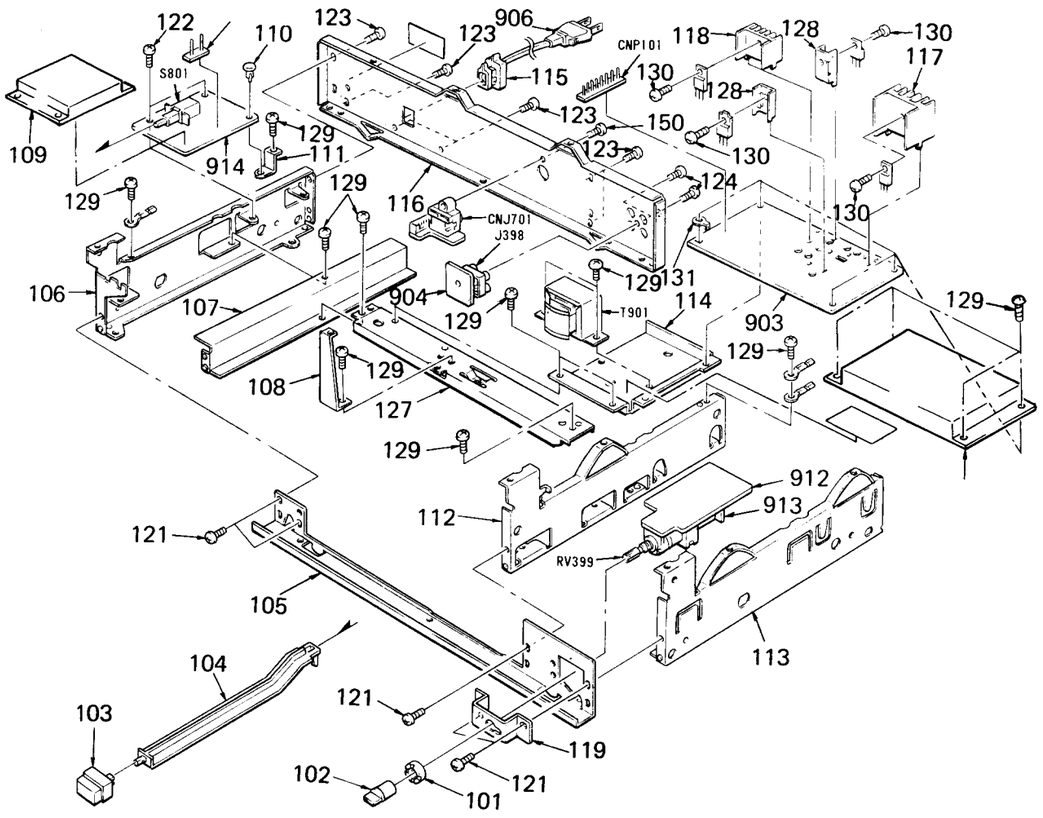

(4)

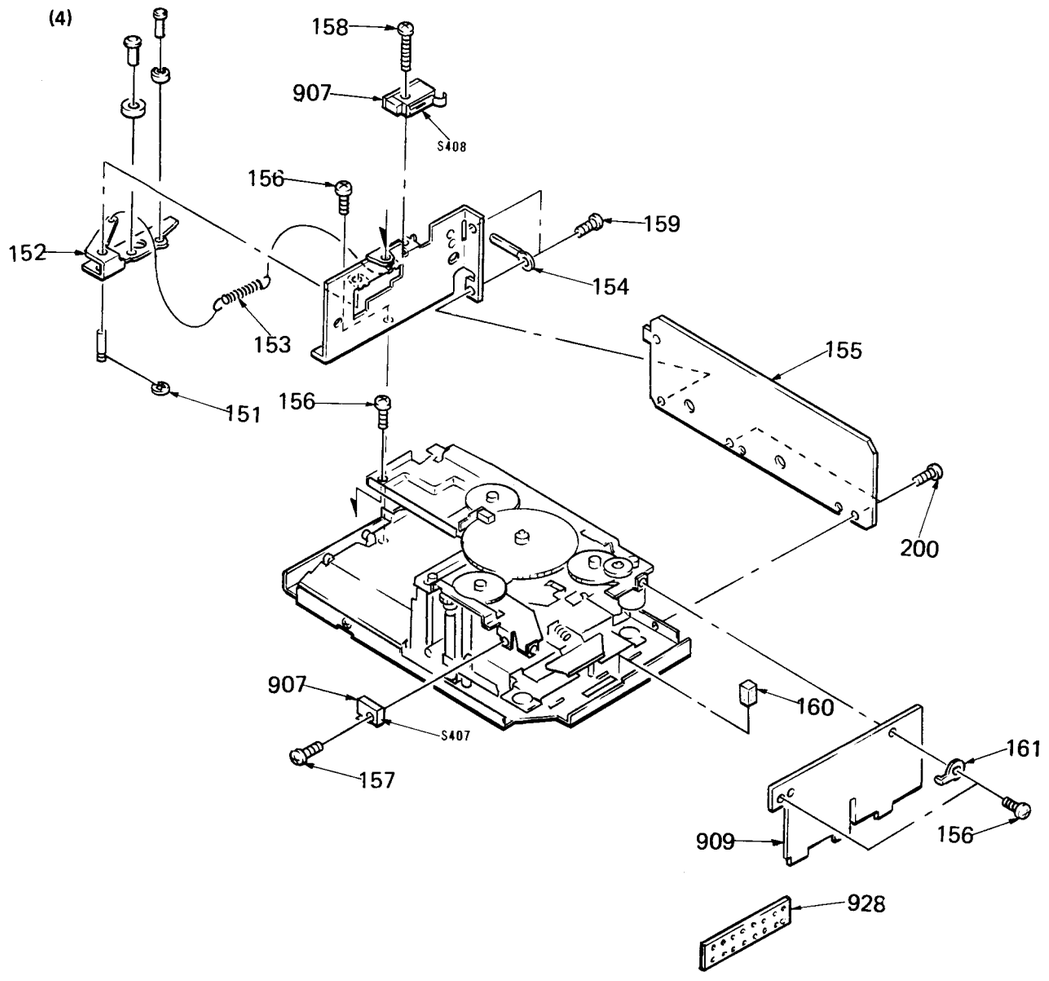

The components identified by shading and mark ⚠ are critical for safety. Replace only with part number specified.

Les composants identifiés par une trame et une marque ⚠ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

No.	Part No.	Description	Remarks
101	4-917-456-01	NUT, SPECIAL	
102	4-917-454-01	KNOB, LOV	
103	4-917-460-01	KNOB, POWER	
104	*4-917-459-01	LEVER, POWER SWITCH	
105	*4-917-472-01	FRAME, SUB	
106	*4-917-467-01	FRAME (LEFT)	
107	*4-917-470-01	BRACKET, MD	
108	*4-917-447-01	BRACKET (M), PC BOARD	
109	*4-917-486-01	COVER	
110	4-812-134-11	RIVET NYLON, 3.5	
111	*4-917-446-01	BRACKET (P), PC BOARD	
112	*4-917-468-01	FRAME (MIDDLE)	
113	*4-917-469-01	FRAME (RIGHT)	
114	*4-917-458-01	BRACKET, TRANSFORMER	
115	3-703-244-00	BUSHING (2104), CORD	
116	*4-917-401-11	PLATE, JACK	
117	*4-363-146-00	HEAT SINK, V.OUT	
118	*4-363-147-00	HEAT SINK, H.PIN	
119	*4-917-445-01	BRACKET, VOLUME	
120	7-685-872-01	+BVTT 3X8 CZN	
121	7-685-871-01	SCREW +BVTT 3X6 (S)	
123	3-703-473-00	SCREW, TERMINAL	
127	*4-917-471-01	REINFORCEMENT	
128	*3-309-144-01	HEAT SINK	
129	7-685-871-01	SCREW +BVTT 3X6 (S)	
130	2-259-121-00	SCREW, TR	
131	4-870-539-00	PLATE, GROUND	
903	*A-4653-067-A	MOUNTED PCB, POWER	
904	*1-620-691-11	PC BOARD, SUB CORD	
905	*1-620-688-11	PC BOARD, LINE OUT	
906	⚠1-557-577-11	CORD, POWER	
912	*1-620-689-11	PC BOARD, VOLUME	
913	*1-620-690-11	PC BOARD, MOTOR	
914	*1-620-698-11	PC BOARD, POWER SW	

No.	Part No.	Description	Remarks
150	7-685-646-79	SCREW +BVTP 3X8 TYPE2 N-S	
151	7-624-118-01	RING, RETAINING E-2.5	
152	*X-4917-404-1	LEVER ASSY, PACK RETAINER	
153	4-917-411-01	SPRING (STOPPER), TENSION	
155	*4-917-436-01	PLATE (REAR)	
156	7-685-791-09	SCREW +BVTT 2.6X5 (S)	
157	7-685-855-01	+BVTT 2X10 (S)	
158	7-621-255-25	SCREW +P 2X4	
159	7-682-544-04	SCREW +P 3X3	
160	9-911-843-XX	CUSHION	
161	4-870-539-00	PLATE, GROUND	
907	*1-617-987-12	PC BOARD, COMMON	
908	*1-617-987-12	PC BOARD, COMMON	
909	*A-4654-002-A	MOUNTED PCB, RF	
928	*1-620-697-11	PC BOARD, TRANSLATION	

(5)

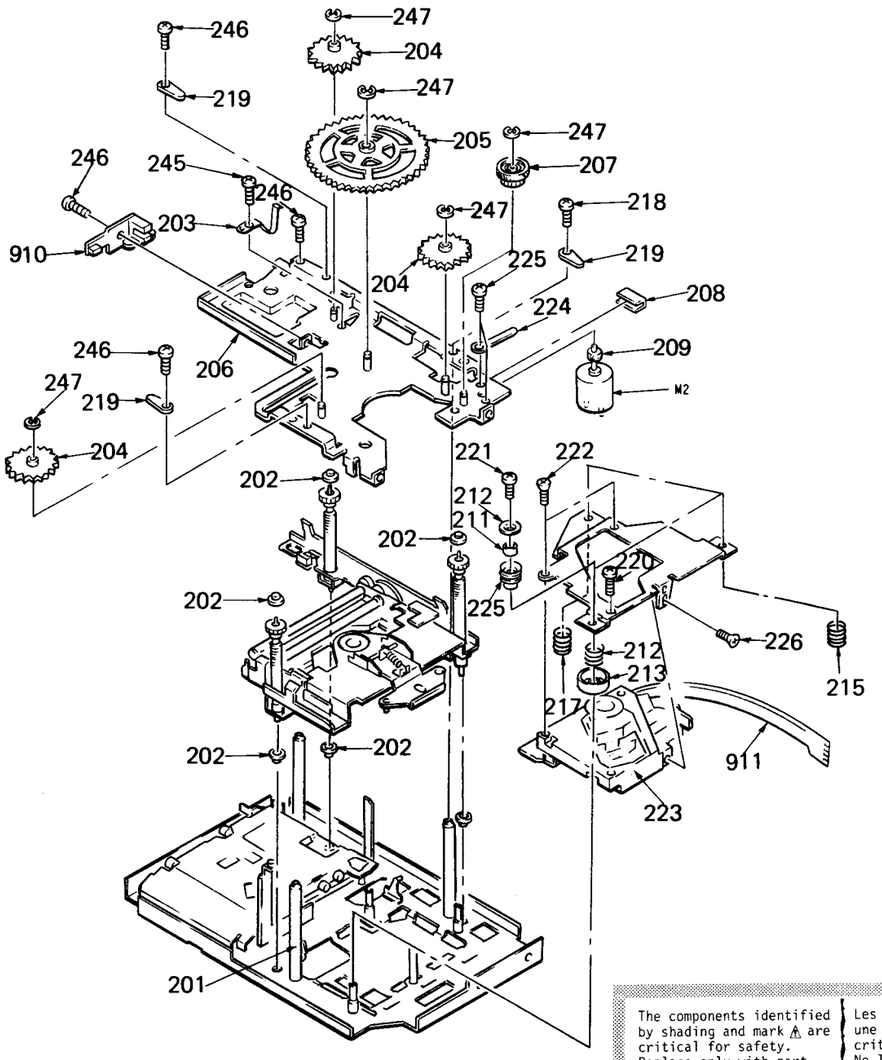

The components identified by shading and mark ⚠ are critical for safety. Replace only with part number specified.

Les composants identifiés par une trame et une marque ⚠ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

No.	Part No.	Description	Remarks
201	3-329-549-01	SHAFT, E FIXED	
202	3-329-595-01	BEARING (UPPER&LOWER), POLY	
203	4-917-405-01	SPRING	
204	4-917-406-01	GEAR (MIDDLE), ELEVATOR	
205	3-331-952-01	GEAR (LARGE), ELEVATOR	
206	*X-4917-416-1	PLATE ASSY, TOP	
207	4-917-420-01	GEAR (SMALL), ELEVATOR	
208	3-831-441-11	CUSHION	
209	4-917-404-01	GEAR, MOTOR	
210	*X-3329-510-1	LEVER ASSY, SLIDER SET	
211	4-917-417-01	SPACER, FLOATING	
212	4-917-412-01	SPRING, COMPRESSION	
213	*4-917-424-01	RETAINER, SPRING	
214	*X-4917-408-1	CHASSIS ASSY, BOTTOM	
215	4-917-413-01	SPRING, COMPRESSION	
216	*4-917-438-01	PLATE, BASE, OPTICS	
217	4-917-414-01	SPRING, COMPRESSION	
218	7-682-545-09	SCREW +B 3X4	
219	3-331-907-01	RETAINER, SCREW, FEED	
220	*4-917-423-01	RETAINER, FLOATING	
221	7-621-255-10	SCREW +P 2X3	
222	7-685-203-01	SCREW +KTP 2X5 TYPE 2	
223	A-8848-057-01	PICKUP, OPTICAL KSM-100M	
224	*3-493-875-00	HOLDER, WIRE	
225	7-682-544-04	SCREW +P 3X3	
226	7-621-255-25	SCREW +P 2X4	
245	7-621-775-00	SCREW +P 2.6X3	
246	7-685-791-09	SCREW +BVTT 2.6X5 (S)	
247	7-624-118-01	RING, RETAINING E-2.5	
910	*1-621-309-11	PC BOARD, EHS	
911	*1-620-723-11	PC BOARD, RF FLEXIBLE	
M3	A-3239-495-A	M3 ASSY	

(6)

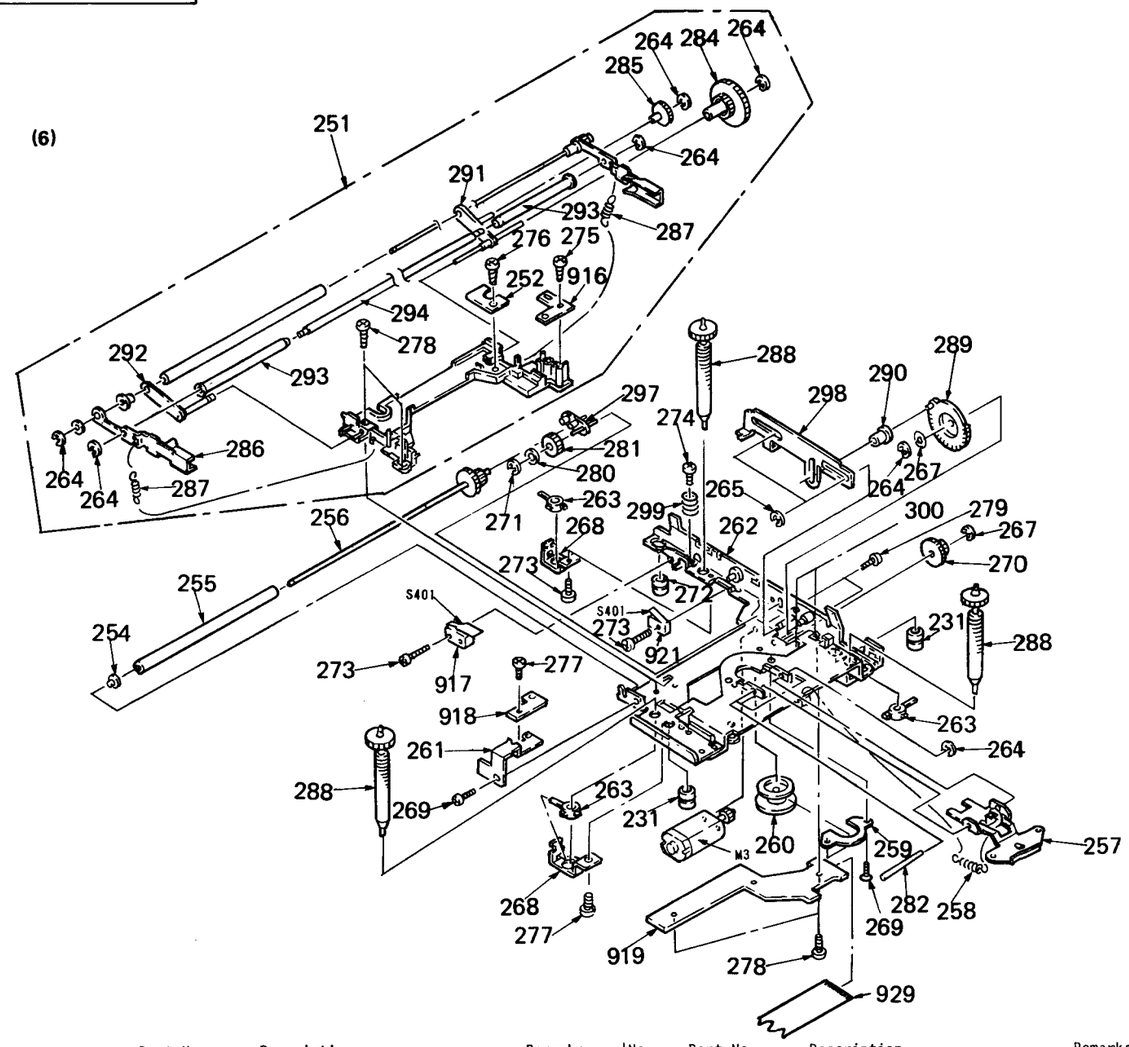

No.	Part No.	Description	Remarks
251	X-4917-415-1	OVERALL ASSY, DISK GUIDE	
252	*3-333-006-01	REINFORCEMENT	
253	*X-3329-529-0	GUIDE (GENERAL) ASSY, DISK	
254	3-329-558-01	BEARING, MAIN ROLLER	
255	3-323-231-02	ROLLER (LOWER)	
256	X-3329-520-1	SHAFT (LOWER) ASSY, ROLLER	
257	*X-4917-401-1	ARM ASSY, CHUCK	
258	4-917-416-01	SPRING (CHUCK), TENSION	
259	*4-917-402-01	SUPPORT, CHUCK	
260	A-3239-494-A	CHUCKING COMPLETE ASSY	
261	*3-331-908-01	BRACKET, PHOTO	
262	*X-4917-407-1	CHASSIS ASSY, E	
263	3-329-560-01	SCREW, M6	
264	7-624-102-04	STOP RING 1.5, TYPE -E	
265	7-624-104-04	STOP RING 2.0, TYPE -E	
267	3-895-818-01	WASHER, POLYETHYLENE, COTTER	
268	*3-329-570-01	PLATE, SCREW	
269	7-627-452-28	SCREW, PRECISION +K 2X4	
270	4-917-421-01	GEAR (B), ROLLER	
271	3-321-813-11	WASHER, COTTER POLYETHYLENE	
273	7-685-855-01	+BVTT 2X10 (S)	
274	7-621-772-40	SCREW +B 2X8	
275	7-685-132-14	SCREW +P 2.6X5 TYPE2 NON-SLIT	
276	7-621-773-95	SCREW +B 2.6X6	
277	7-685-781-04	SCREW +BVTT 2X4 (S)	
278	7-685-791-09	SCREW +BVTT 2.6X5 (S)	
279	7-621-255-10	SCREW +P 2X3	
280	3-329-553-01	SPRING, E	
281	3-329-555-01	GEAR (E), R	
282	*3-329-559-01	SHAFT, DISK CHUCK	
284	3-331-914-01	GEAR, ROLLER 3 STEP	
285	3-331-924-01	GEAR (G), ROLLER	
286	3-534-411-01	WASHER (R)	
287	3-547-665-11	SPRING, TENSION	
288	X-3329-524-1	SCREW ASSY, FEED	
289	3-331-943-01	GEAR (F), R	
290	3-329-547-01	ROLLER, IDLE	
291	*X-3329-516-1	LEVER (B) ASSY, LINK	
292	*X-3329-517-1	LEVER (F) ASSY, LINK	
293	X-3329-518-1	ROLLER (UPPER) ASSY	
294	*3-329-552-01	SHAFT, SIDE ROLLER	
295	*X-4917-414-1	SHAFT (UPPER) ASSY, ROLLER	
297	*X-3329-522-1	LEVER ASSY, R	
298	*3-331-944-01	LEVER, SLIDE	
299	3-534-512-01	SPRING, COMPRESSION	
300	3-831-441-11	CUSHION	
916	*1-617-991-13	PC BOARD, DOE	
917	*1-617-986-13	PC BOARD, CB SW	
918	*1-617-990-12	PC BOARD, DPT	
919	*1-617-995-11	PC BOARD, E	
920	A-4608-332-A	M2 ASSY	
921	*1-617-985-13	PC BOARD, M1 SW	
929	*1-620-724-11	PC BOARD, MD FLEXIBLE	

(7)

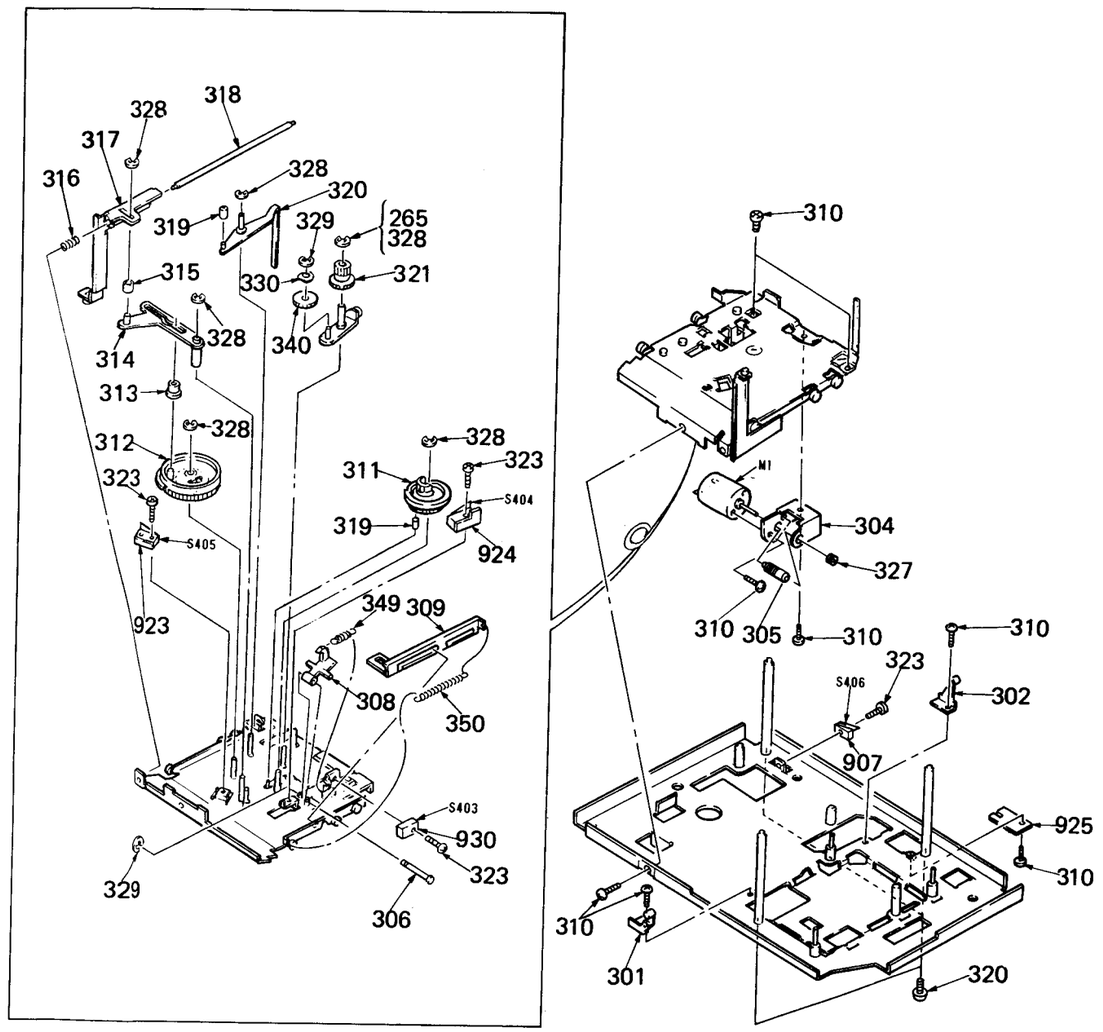

No.	Part No.	Description	Remarks
301	*X-4917-402-1	OPENER (LEFT) ASSY, CHUCK	
302	*X-4917-403-1	OPENER (RIGHT) ASSY, CHUCK	
304	4-917-418-01	BRACKET, MOTOR	
305	7-671-156-01	BALL, STAINLESS	
306	*3-329-573-01	SHAFT, LOCK HOOK	
307	*X-4917-406-1	CHASSIS ASSY, PACK	
308	3-331-902-01	HOOK, PACK LOCK	
309	*4-917-439-01	LEVER, EJECT	
310	7-685-791-09	SCREW +BVTT 2.6X5 (S)	
311	4-917-437-01	GEAR (3), EJECT CAM	
312	X-3329-513-1	GEAR ASSY, CAM	
313	3-331-905-01	ROLLER (A)	
314	*X-3329-507-1	LEVER ASSY, LINEAR	
315	3-331-927-01	ROLLER, LINEAR LEVER	
316	3-568-315-01	SPRING, COMPRESSION	
317	X-4917-417-1	SLIDER ASSY, LINEAR	

No.	Part No.	Description	Remarks
318	3-331-904-01	SHAFT, LINEAR SLIDER	
319	3-329-580-01	ROLLER, CAM	
320	7-682-545-09	SCREW +P 3X4	
321	3-329-590-01	WHEEL, WORM	
323	7-621-255-55	SCREW +P 2X8	
327	3-489-073-00	SCREW, THRUST	
328	7-624-104-04	STOP RING 2.0, TYPE -E	
329	7-624-102-04	STOP RING 1.5, TYPE -E	
330	3-329-553-01	SPRING, E	
340	3-329-591-01	GEAR WHEEL, WURM	
349	3-535-369-XX	SPRING, TENSION	
922	A-4608-331-A	M1 ASSY	
923	*1-617-994-12	PC BOARD, LOT SW	
924	*1-617-993-12	PC BOARD, EJ SW	
925	*1-617-987-12	PC BOARD, COMMON	
930	*1-617-992-12	PC BOARD, PS SW	

(8)

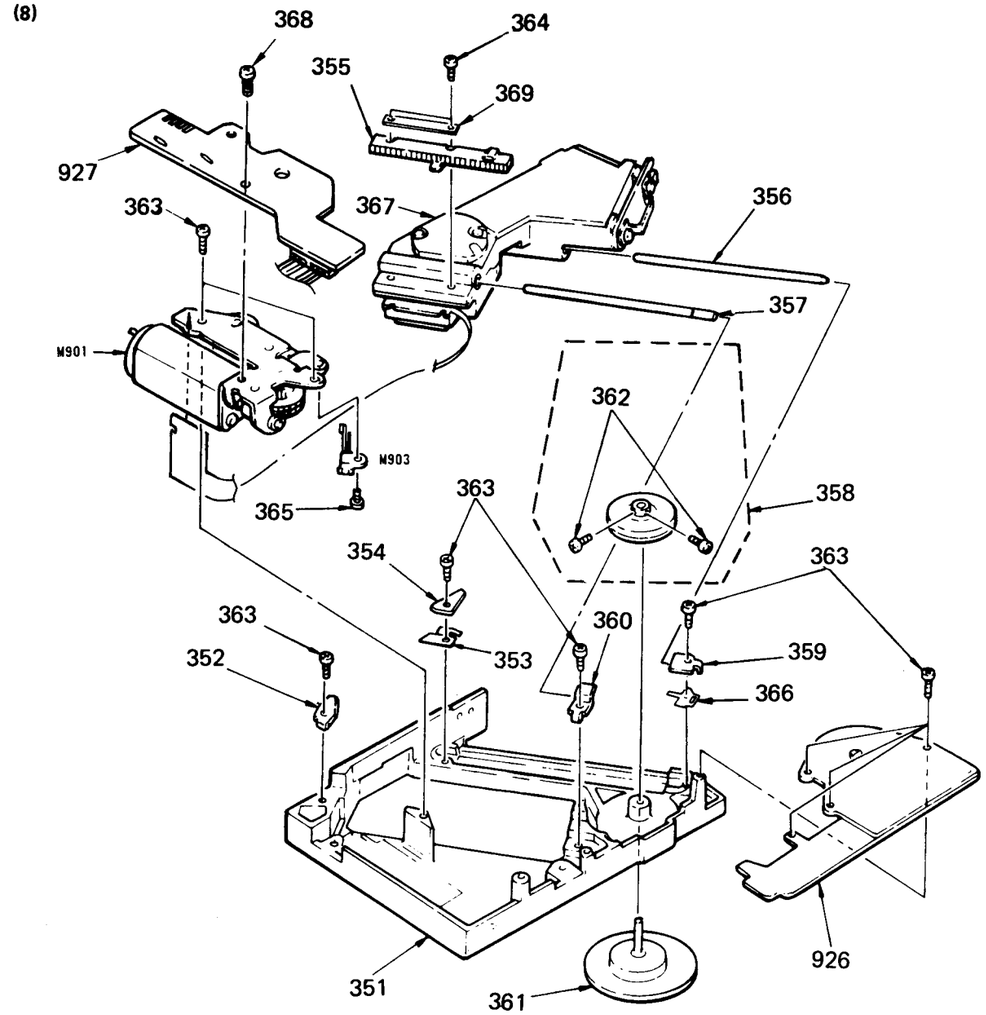

The components identified by shading and mark ⚠ are critical for safety. Replace only with part number specified.

Les composants identifiés par une trame et une marque ⚠ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

No.	Part No.	Description	Remarks
351	X-3320-103-3	CHASSIS ASSY	
352	3-320-103-01	RETAINER (B)	
353	3-320-130-01	SPRING (A), LEAF	
354	3-320-140-01	RETAINER (C)	
355	3-320-121-01	RACK	
356	3-320-107-01	SHAFT (B)	
357	3-320-106-01	SHAFT (B)	
358	X-2622-803-1	ROTOR ASSY	
359	3-320-105-01	RETAINER (D)	
360	3-320-102-01	RETAINER (A)	
361	X-3320-101-1	TURNTABLE ASSY	
362	2-622-805-01	SCREW	

No.	Part No.	Description	Remarks
363	3-703-816-11	SCREW (M1.4X4)	
364	7-627-552-77	SCREW PRECSION +P 1.7X6	
365	7-627-553-37	SCREW PRECSION +P 2X3	
366	3-320-131-01	SPRING (B), LEAF	
367	A-8-848-057-01	KSM-100H	
368	7-685-851-01	SCREW +BVTT 2X4	
369	3-320-133-01	SPACER, RACK	
931	X-2622-801-1	PC BOARD ASSY, STATOR	
932	1-617-121-11	AX-1 BOARD	
M901	X-3320-102-1	MOTOR ASSY, SLED	
S903	1-553-198-00	SWITCH, LEAF (SLEDLIMIT)	

SECTION 3
ELECTRICAL PARTS LIST

NOTE:

- Items marked " ★ " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- If there are two or more same circuitsin a set such as a stereophonic machine, only typical circuit parts may be indicated and capacitors and resistors in other same circuits may be omitted.

CAPACITORS:
MF:μF, PF:μμF.

RESISTORS
- All resistors are in ohms.
- F : nonflammable

COILS
- MMH : mH, UH : μH

SEMICONDUCTORS
In each case, U : μ, for example:
UA...: μA..., UPA...: μPA..., UPC...: μPC, UPD...: μPD...

The components identified by shading and mark ⚠ are critical for safety. Replace only with part number specified.

Les composants identifiés par une trame et une marque ⚠ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

ELECTRICAL PARTS

Ref.No.	Part No.	Description
900	*1-620-694-11	PC BOARD, TIMER
901	*A-4657-032-A	MOUNTED PCB, DISPLAY
902	*A-4651-095-A	MOUNTED PCB, MAIN
903	*A-4653-067-A	MOUNTED PCB, POWER
904	*1-620-691-11	PC BOARD, SUB CORD
905	*1-620-688-11	PC BOARD, LINE OUT
906	1-557-577-11	CORD, POWER
907	*1-617-987-12	PC BOARD, COMMON
908	*1-617-987-12	PC BOARD, COMMON
909	*A-4654-002-A	MOUNTED PCB, RF
910	*1-621-309-11	PC BOARD, EHS
911	*1-620-723-11	PC BOARD, RF FLEXIBLE
912	*1-620-689-11	PC BOARD, VOLUME
913	*1-620-690-11	PC BOARD, MOTOR
914	*1-620-698-11	PC BOARD, POWER SW
915	*1-620-693-11	PC BOARD, HEADPHONE
916	*1-617-991-13	PC BOARD, DOE
917	*1-617-986-13	PC BOARD, CB SW
918	*1-617-990-12	PC BOARD, DPT
919	*1-617-995-11	PC BOARD, E
920	A-4608-332-A	M2 ASSY
921	*1-617-985-13	PC BOARD, M1 SW
922	A-4608-331-A	M1 ASSY
923	*1-617-994-12	PC BOARD, LOT SW
924	*1-617-993-12	PC BOARD, EJ SW
925	*1-617-987-12	PC BOARD, COMMON
926	*1-560-242-21	BUS BAR 4P
927	*1-620-692-11	PC BOARD, FUNCTION
928	*1-620-697-11	PC BOARD, TRANSLATION
929	*1-620-724-11	PC BOARD, MD FLEXIBLE
930	*1-617-992-12	PC BOARD, PS SW
931	X-2622-801-1	PC BOARD ASSY, STATOR
932	1-617-121-11	AX-1 BOARD
C101	1-123-338-00	ELECT 2200MF 20% 25V
C102	1-123-338-00	ELECT 2200MF 20% 25V
C105	1-124-897-11	ELECT 3300MF 20% 16V
C106	1-124-557-11	ELECT 1000MF 20% 25V
C107	1-124-473-11	ELECT 1000MF 20% 10V
C108	1-124-472-11	ELECT 470MF 20% 10V
C109	1-124-475-11	ELECT 470MF 20% 16V
C110	1-124-907-00	ELECT 10MF 20% 50V
C111	1-124-907-00	ELECT 10MF 20% 50V
C112	1-124-121-00	ELECT 100MF 20% 35V
C113	1-124-910-11	ELECT 47MF 20% 50V
C114	1-124-121-00	ELECT 100MF 20% 35V

ELECTRICAL PARTS

Ref.No.	Part No.	Description
C115	1-124-563-11	ELECT 2200MF 20% 25V
C116	1-124-907-00	ELECT 10MF 20% 50V
C117	1-124-443-00	ELECT 100MF 20% 10V
C201	1-162-213-31	CERAMIC 39PF 5% 50V
C202	1-162-213-31	CERAMIC 39PF 5% 50V
C203	1-161-974-00	CERAMIC 0.1MF 20% 16V
C204	1-161-974-00	CERAMIC 0.1MF 20% 16V
C205	1-123-820-00	ELECT 33MF 20% 16V
C206	1-162-306-31	CERAMIC 0.01MF 20% 16V
C207	1-124-903-00	ELECT 1MF 20% 50V
C208	1-123-820-00	ELECT 33MF 20% 16V
C209	1-161-974-00	CERAMIC 0.1MF 20% 16V
C210	1-136-162-00	FILM 0.056MF 5% 50V
C211	1-130-471-00	MYLAR 0.001MF 5% 50V
C212	1-130-482-00	MYLAR 0.0082MF 5% 50V
C213	1-136-155-00	FILM 0.015MF 5% 50V
C214	1-162-211-31	CERAMIC 33PF 5% 50V
C215	1-124-481-11	ELECT 22MF 20% 25V
C221	1-102-647-00	CERAMIC 39PF 5% 50V
C222	1-102-658-00	CERAMIC 180PF 5% 50V
C223	1-102-725-00	CERAMIC 36PF 5% 50V
C224	1-162-302-31	CERAMIC 0.0022MF 2% 16V
C225	1-123-661-00	ELECT 100MF 2% 6.3V
C226	1-162-302-31	CERAMIC 0.0022MF 2% 16V
C227	1-123-661-00	ELECT 100MF 2% 6.3V
C228	1-162-282-31	CERAMIC 100PF 1% 50V
C229	1-136-153-00	FILM 0.01MF 5% 50V
C230	1-162-286-31	CERAMIC 220PF 1% 50V
C231	1-124-927-11	ELECT 4.7MF 2% 50V
C232	1-162-292-31	CERAMIC 680PF 1% 50V
C233	1-124-907-00	ELECT 10MF 2% 50V
C241	1-123-609-00	ELECT 0.33MF 2% 50V
C242	1-136-161-00	FILM 0.047MF 5% 50V
C243	1-130-475-00	MYLAR 0.0022MF 5% 50V
C244	1-123-661-00	ELECT 100MF 2% 6.3V
C245	1-136-153-00	FILM 0.01MF 5% 50V
C246	1-131-371-00	TANTALUM 10MF 1% 16V
C247	1-124-904-00	ELECT 2.2MF 2% 50V
C248	1-136-162-00	FILM 0.056MF 5% 50V
C249	1-130-474-00	MYLAR 0.0018MF 5% 50V
C250	1-130-479-00	MYLAR 0.0047MF 5% 50V
C251	1-162-282-31	CERAMIC 100PF 1% 50V
C252	1-136-164-00	FILM 0.082MF 5% 50V
C253	1-162-282-31	CERAMIC 100PF 1% 50V
C254	1-123-607-00	ELECT 0.1MF 2% 50V
C255	1-162-302-31	CERAMIC 0.0022MF 2% 16V

ELECTRICAL PARTS

Ref.No.	Part No.	Description			
C256	1-162-302-31	CERAMIC	0.0022MF	20%	16V
C257	1-162-199-31	CERAMIC	10PF	5%	50V
C258	1-162-302-31	CERAMIC	0.0022MF	20%	16V
C259	1-124-903-00	ELECT	1MF	20%	50V
C260	1-123-323-00	ELECT	470MF	20%	16V
C261	1-123-323-00	ELECT	470MF	20%	16V
C262	1-123-661-00	ELECT	100MF	20%	6.3V
C263	1-130-479-00	MYLAR	0.0047MF	5%	50V
C264	1-124-903-00	ELECT	1MF	20%	50V
C265	1-130-477-00	MYLAR	0.0033MF	5%	50V
C285	1-123-820-00	ELECT	33MF	20%	16V
C286	1-130-475-00	MYLAR	0.0022MF	5%	50V
C287	1-124-904-00	ELECT	2.2MF	20%	50V
C288	1-162-306-31	CERAMIC	0.01MF	20%	16V
C289	1-162-294-31	CERAMIC	0.001MF	10%	50V
C290	1-162-294-31	CERAMIC	0.001MF	10%	50V
C291	1-162-282-31	CERAMIC	100PF	10%	50V
C292	1-162-306-31	CERAMIC	0.01MF	20%	16V
C293	1-162-211-31	CERAMIC	33PF	5%	50V
C294	1-162-211-31	CERAMIC	33PF	5%	50V
C295	1-123-332-00	ELECT	47MF	20%	16V
C296	1-161-974-00	CERAMIC	0.1MF	20%	16V
C297	1-161-974-00	CERAMIC	0.1MF	20%	16V
C298	1-161-974-00	CERAMIC	0.1MF	20%	16V
C299	1-161-974-00	CERAMIC	0.1MF	20%	16V
C300	1-123-607-00	ELECT	0.1MF	20%	50V
C301	1-124-903-00	ELECT	1MF	20%	50V
C331	1-123-323-00	ELECT	470MF	20%	16V
C332	1-104-280-11	POLYSTYRENE	120PF	5%	50V
C333	1-123-318-00	ELECT	33MF	20%	16V
C334	1-123-318-00	ELECT	33MF	20%	16V
C335	1-123-318-00	ELECT	33MF	20%	16V
C338	1-123-357-00	ELECT	22MF	20%	50V
C339	1-107-322-00	MICA	22PF	5%	500V
C340	1-123-323-00	ELECT	470MF	20%	16V
C341	1-123-335-00	ELECT	330MF	20%	25V
C345	1-130-305-00	FILM	0.022MF	5%	100V
C346	1-161-974-00	CERAMIC	0.1MF	20%	16V
C347	1-123-308-00	ELECT	220MF	20%	10V
C351	1-124-478-11	ELECT	100MF	20%	25V
C355	1-162-290-31	CERAMIC	470PF	10%	50V
C361	1-123-323-00	ELECT	470MF	20%	16V
C362	1-104-280-11	POLYSTYRENE	120PF	5%	50V
C363	1-123-318-00	ELECT	33MF	20%	16V
C364	1-123-318-00	ELECT	33MF	20%	16V
C365	1-123-318-00	ELECT	33MF	20%	16V
C368	1-123-357-00	ELECT	22MF	20%	50V
C369	1-107-322-00	MICA	22PF	5%	500V
C370	1-123-323-00	ELECT	470MF	20%	16V
C371	1-123-335-00	ELECT	330MF	20%	25V
C381	1-124-478-11	ELECT	100MF	20%	25V
C385	1-162-290-31	CERAMIC	470PF	10%	50V
C391	1-123-308-00	ELECT	220MF	20%	10V
C392	1-123-308-00	ELECT	220MF	20%	10V
C393	1-123-308-00	ELECT	220MF	20%	10V
C394	1-123-308-00	ELECT	220MF	20%	10V
C395	1-162-291-31	CERAMIC	560PF	10%	50V
C396	1-162-291-31	CERAMIC	560PF	10%	50V

ELECTRICAL PARTS

Ref.No.	Part No.	Description			
C397	1-161-974-00	CERAMIC	0.1MF	20%	16V
C398	1-130-305-00	FILM	0.022MF	5%	100V
C399	1-161-974-00	CERAMIC	0.1MF	20%	16V
C401	1-162-207-31	CERAMIC	22PF	5%	50V
C402	1-162-207-31	CERAMIC	22PF	5%	50V
C403	1-136-153-00	FILM	0.01MF	5%	50V
C404	1-136-159-00	FILM	0.033MF	5%	50V
C405	1-136-153-00	FILM	0.01MF	5%	50V
C406	1-124-468-11	ELECT	100MF	20%	6.3V
C407	1-123-607-00	ELECT	0.1MF	20%	50V
C408	1-124-468-11	ELECT	100MF	20%	6.3V
C409	1-124-468-11	ELECT	100MF	20%	6.3V
C410	1-131-385-00	TANTALUM	22MF	10%	6.3V
C411	1-124-902-00	ELECT	0.47MF	20%	50V
C412	1-136-159-00	FILM	0.033MF	5%	50V
C413	1-162-217-31	CERAMIC	56PF	5%	50V
C414	1-162-217-31	CERAMIC	56PF	5%	50V
C415	1-131-385-00	TANTALUM	22MF	10%	6.3V
C416	1-124-896-00	ELECT	33MF	20%	16V
C417	1-162-294-31	CERAMIC	0.001MF	10%	50V
C501	1-162-306-31	CERAMIC	0.01MF	20%	16V
C502	1-162-211-31	CERAMIC	33PF	5%	50V
C503	1-162-211-31	CERAMIC	33PF	5%	50V
C504	1-162-306-31	CERAMIC	0.01MF	20%	16V
C505	1-123-617-00	ELECT	10MF	20%	16V
C701	1-162-596-00	CERAMIC	0.022MF		25V
C801	1-161-744-00	CERAMIC	0.01MF		400V
C802	1-161-744-00	CERAMIC	0.01MF		400V
C803	1-161-744-00	CERAMIC	0.01MF		400V
C804	1-161-742-00	CERAMIC	0.0022MF	20%	400V
C805	1-161-742-00	CERAMIC	0.0022MF	20%	400V
C806	1-161-742-00	CERAMIC	0.0022MF	20%	400V
C807	1-161-742-00	CERAMIC	0.0022MF	20%	400V
C901	1-124-290-00	ELECT	47MF	20%	6.3V
C902	1-161-974-00	CERAMIC	0.1MF	20%	16V
CNJ701	1-563-486-11	SOCKET, CONNECTOR			
CNP101*	1-535-121-00	TERMINAL			
CNP201*	1-564-505-11	PLUG, CONNECTOR 2P			
CNP202*	1-564-509-11	PLUG, CONNECTOR 6P			
CNP203*	1-564-708-11	PIN, CONNECTOR (SMALL TYPE) 6P			
CNP204*	1-564-708-11	PIN, CONNECTOR (SMALL TYPE) 6P			
CNP302*	1-564-518-11	PLUG, CONNECTOR 3P			
CNP303*	1-564-507-11	PLUG, CONNECTOR 4P			
CNP401	1-563-140-11	SOCKET, CONNECTOR 9P			
CNP402*	1-564-725-11	PIN, CONNECTOR (SMALL TYPE) 9P			
CNP403*	1-564-706-11	PIN, CONNECTOR (SMALL TYPE) 4P			
CNP404*	1-562-882-11	SOCKET, CONNECTOR 12P			
CNP405*	1-564-704-31	PIN, CONNECTOR (SMALL TYPE) 2P			
CNP406*	1-564-704-11	PIN, CONNECTOR (SMALL TYPE) 2P			
CNP407*	1-564-704-11	PIN, CONNECTOR (SMALL TYPE) 2P			
CNP408*	1-564-707-11	PIN, CONNECTOR (SMALL TYPE) 5P			
CNP409*	1-564-721-11	PIN, CONNECTOR (SMALL TYPE) 5P			
CNP410*	1-564-708-11	PIN, CONNECTOR (SMALL TYPE) 6P			
CNP411*	1-564-724-11	PIN, CONNECTOR (SMALL TYPE) 8P			
CNP412*	1-564-724-31	PIN, CONNECTOR (SMALL TYPE) 8P			
CNP414*	1-564-710-11	PIN, CONNECTOR (SMALL TYPE) 8P			
CNP415	1-564-729-11	PIN, CONNECTOR (SMALL TYPE)13P			

ELECTRICAL PARTS

Ref.No.	Part No.	Description
CNP501*1-564-336-00		PIN, CONNECTOR 2P
CNP502*1-564-666-11		PIN, CONNECTOR 10P
CNP503*1-564-666-11		PIN, CONNECTOR 10P
CNP504*1-564-704-11		PIN, CONNECTOR (SMALL TYPE) 2P
CNP505*1-564-707-11		PIN, CONNECTOR (SMALL TYPE) 5P
CNP506*1-564-712-11		PIN, CONNECTOR (SMALL TYPE)10P
CNP801*1-535-139-00		BASE POST 19MM (10MM PITCH) 2P
CP501	1-232-847-11	COMPOSITION CIRCUIT BLOCK
CP502	1-233-082-11	COMPOSITION CIRCUIT BLOCK
D101	8-719-937-49	DIODE RDFO2M
D102	8-719-884-01	DIODE 10DF2
D103	8-719-884-01	DIODE 10DF2
D104	8-719-884-01	DIODE 10DF2
D105	8-719-884-01	DIODE 10DF2
D106	8-719-200-23	DIODE 11E2TA2
D107	8-719-200-23	DIODE 11E2TA2
D108	8-719-200-23	DIODE 11E2TA2
D109	8-719-200-23	DIODE 11E2TA2
D110	8-719-940-77	DIODE 1SS132
D111	8-719-940-77	DIODE 1SS132
D112	8-719-940-77	DIODE 1SS132
D113	8-719-940-77	DIODE 1SS132
D115	8-719-940-77	DIODE 1SS132
D116	8-719-109-75	DIODE RD4.3ES-B2
D117	8-719-932-66	DIODE RD20ES-B1
D118	8-719-910-65	DIODE HZ6B1LTP
D119	8-719-929-15	DIODE HZS9.1NB2
D201	8-719-936-68	DIODE KV1260
D202	8-719-110-17	DIODE RD10ES-B2
D203	8-719-110-17	DIODE RD10ES-B2
D204	8-719-110-17	DIODE RD10ES-B2
D205	8-719-951-13	DIODE HZ5CLL
D206	8-719-921-11	DIODE HZ2ALL
D207	8-719-921-11	DIODE HZ2ALL
D208	8-719-940-77	DIODE 1SS132
D209	8-719-940-77	DIODE 1SS132
D210	8-719-940-77	DIODE 1SS132
D211	8-719-940-77	DIODE 1SS132
D212	8-719-940-77	DIODE 1SS132
D213	8-719-940-77	DIODE 1SS132
D214	8-719-940-77	DIODE 1SS132
D215	8-719-940-77	DIODE 1SS132
D216	8-719-940-77	DIODE 1SS132
D217	8-719-940-77	DIODE 1SS132
D218	8-719-940-77	DIODE 1SS132
D219	8-719-940-77	DIODE 1SS132
D220	8-719-940-77	DIODE 1SS132
D221	8-719-940-77	DIODE 1SS132
D222	8-719-940-77	DIODE 1SS132
D223	8-719-940-77	DIODE 1SS132
D224	8-719-940-77	DIODE 1SS132
D225	8-719-940-77	DIODE 1SS132
D226	8-719-940-77	DIODE 1SS132
D227	8-719-940-77	DIODE 1SS132
D228	8-719-940-77	DIODE 1SS132
D229	8-719-940-77	DIODE 1SS132
D230	8-719-940-77	DIODE 1SS132

ELECTRICAL PARTS

Ref.No.	Part No.	Description
D231	8-719-940-77	DIODE 1SS132
D232	8-719-940-77	DIODE 1SS132
D233	8-719-940-77	DIODE 1SS132
D234	8-719-100-75	DIODE RD4.3ES-B2
D235	8-719-940-77	DIODE 1SS132
D236	8-719-940-77	DIODE 1SS132
D301	8-719-951-13	DIODE HZ5CLL
D302	8-719-951-13	DIODE HZ5CLL
D401	8-719-812-31	DIODE TLR123
D402	8-719-812-31	DIODE TLR123
D403	8-719-940-77	DIODE 1SS132
D404	8-719-921-11	DIODE HZ2ALL
D405	8-719-911-06	DIODE 1SS106
D406	8-719-911-06	DIODE 1SS106
D407	8-719-911-06	DIODE 1SS106
D501	8-719-940-77	DIODE 1SS132
D502	8-719-940-77	DIODE 1SS132
D503	8-719-940-77	DIODE 1SS132
D504	8-719-940-77	DIODE 1SS132
D505	8-719-940-77	DIODE 1SS132
D506	8-719-940-77	DIODE 1SS132
D507	8-719-940-77	DIODE 1SS132
D508	8-719-940-77	DIODE 1SS132
D509	8-719-940-77	DIODE 1SS132
D510	8-719-907-86	DIODE BG5638S
D511	8-719-907-86	DIODE BG5638S
D512	8-719-907-85	DIODE AA5638S
D513	8-719-940-77	DIODE 1SS132
D514	8-719-907-85	DIODE AA5638S
D515	8-719-907-86	DIODE BG5638S
D516	8-719-907-85	DIODE AA5638S
D517	8-719-907-86	DIODE BG5638S
D518	8-719-907-85	DIODE AA5638S
D519	8-719-907-87	DIODE PR5638S
D520	8-719-907-86	DIODE BG5638S
FL501	1-519-275-00	INDICATOR TUBE, FLUORESCENT
IC101	8-759-924-12	IC LM7805CT
IC102	8-759-929-64	IC LM7905CT
IC105	8-759-924-12	IC LM7805CT
IC201	8-752-322-05	IC CXD1135Q
IC202	8-759-910-36	IC MSM5128-20GS
IC203	8-759-107-83	IC UPD7508HC-069
IC204	8-759-918-47	IC MB88501-299M
IC205	8-752-010-80	IC CX20108
IC206	8-759-802-32	IC LB1649
IC207	8-759-802-32	IC LB1649
IC208	8-759-240-66	IC TC4066B
IC209	8-759-240-66	IC TC4066B
IC210	8-759-202-13	IC TC74HCU04P
IC211	8-759-990-82	IC TL082CP
IC212	8-757-991-00	IC CX-7991
IC213	8-759-303-90	IC STA341M
IC301	8-759-938-46	IC PCM56P-JS
IC302	8-759-007-21	IC MC74HC4053N
IC303	8-759-990-82	IC TL082CP
IC304	8-759-170-12	IC UPC78M12H
IC305	8-759-700-24	IC NJM79M12A

ELECTRICAL PARTS

Ref.No.	Part No.	Description
IC306	8-759-202-13	IC TC74HCU04N
IC401	8-752-010-90	IC CX20109
IC402	8-759-145-58	IC UPC4558C
IC502	8-749-900-36	IC BX-1393
IC601	8-759-745-60	IC NJM4560D
J398	1-507-909-21	JACK, PIN 4P
J399	1-507-863-21	JACK, LARGE TYPE
L201	1-426-212-11	COIL (RF)
L801	1-421-915-11	COIL, LINE FILTER
LPF301	1-464-730-11	FILTER UNIT, LOW PASS
LPF302	1-464-730-11	FILTER UNIT, LOW PASS
M3	A-3239-495-A	M3 ASSY
Q101	8-729-205-95	TRANSISTOR 2SA1428Y
Q102	8-729-804-16	TRANSISTOR 2SD1666Q
Q202	8-729-600-27	TRANSISTOR 2SC634SP
Q203	8-729-600-27	TRANSISTOR 2SC634SP
Q204	8-729-600-27	TRANSISTOR 2SC634SP
Q205	8-729-600-27	TRANSISTOR 2SC634SP
Q206	8-729-117-54	TRANSISTOR 2SA1175
Q207	8-729-117-54	TRANSISTOR 2SA1175
Q208	8-729-900-63	TRANSISTOR DTA124ES
Q209	8-729-900-63	TRANSISTOR DTA124ES
Q210	8-729-900-63	TRANSISTOR DTA124ES
Q211	8-729-900-89	TRANSISTOR DTC144ES
Q212	8-729-900-89	TRANSISTOR DTC144ES
Q213	8-729-900-89	TRANSISTOR DTC144ES
Q214	8-729-900-89	TRANSISTOR DTC144ES
Q215	8-729-900-80	TRANSISTOR DTC114ES
Q216	8-729-900-80	TRANSISTOR DTC114ES
Q217	8-729-900-65	TRANSISTOR DTA144ES
Q218	8-729-900-80	TRANSISTOR DTC114ES
Q219	8-729-900-80	TRANSISTOR DTC114ES
Q224	8-729-117-54	TRANSISTOR 2SA1175
Q301	8-729-107-99	TRANSISTOR 2SC3622AK
Q302	8-729-107-99	TRANSISTOR 2SC3622AK
Q305	8-729-900-65	TRANSISTOR DTA144ES
Q306	8-729-900-65	TRANSISTOR DTA144ES
Q401	8-729-110-21	TRANSISTOR PH102
Q402	8-729-110-21	TRANSISTOR PH102
Q403	8-729-906-43	GP-1S03
Q404	8-729-900-36	TRANSISTOR DTC124ES
Q405	8-729-900-63	TRANSISTOR DTA124ES
Q406	8-729-206-43	TRANSISTOR 2SA1426Y
Q501	8-729-900-89	TRANSISTOR DTC144ES
Q502	8-729-900-89	TRANSISTOR DTC144ES
Q503	8-729-900-89	TRANSISTOR DTC144ES
Q504	8-729-900-89	TRANSISTOR DTC144ES
Q505	8-729-900-89	TRANSISTOR DTC144ES
Q506	8-729-900-89	TRANSISTOR DTC144ES
Q507	8-729-900-80	TRANSISTOR DTC114ES
Q508	8-729-900-89	TRANSISTOR DTC144ES
Q509	8-729-900-89	TRANSISTOR DTC144ES
Q510	8-729-900-89	TRANSISTOR DTC144ES
R101	1-249-417-11	CARBON 1K 5% 1/6W
R102	1-247-707-11	CARBON 390 5% 1/4W
R103	1-249-417-11	CARBON 1K 5% 1/6W

ELECTRICAL PARTS

Ref.No.	Part No.	Description			
R104	1-249-441-11	CARBON	100K	5%	1/6W
R106	1-217-387-00	FUSIBLE	10	5%	1/4W F
R107	1-247-721-11	CARBON	4.7K	5%	1/4W
R108	1-249-429-11	CARBON	10K	5%	1/6W
R109	1-247-713-11	CARBON	1K	5%	1/4W
R202	1-247-856-00	CARBON	11K	5%	1/6W
R203	1-249-429-11	CARBON	10K	5%	1/6W
R204	1-249-441-11	CARBON	100K	5%	1/6W
R205	1-249-437-11	CARBON	47K	5%	1/6W
R206	1-247-891-00	CARBON	330K	5%	1/6W
R207	1-247-856-00	CARBON	11K	5%	1/6W
R208	1-247-875-00	CARBON	68K	5%	1/6W
R209	1-247-859-00	CARBON	15K	5%	1/6W
R210	1-247-903-00	CARBON	1M	5%	1/6W
R211	1-247-859-00	CARBON	15K	5%	1/6W
R212	1-247-875-00	CARBON	68K	5%	1/6W
R213	1-247-883-00	CARBON	150K	5%	1/6W
R214	1-247-875-00	CARBON	68K	5%	1/6W
R215	1-247-860-00	CARBON	16K	5%	1/6W
R216	1-249-437-11	CARBON	47K	5%	1/6W
R217	1-247-838-00	CARBON	2K	5%	1/6W
R221	1-249-441-11	CARBON	100K	5%	1/6W
R222	1-249-441-11	CARBON	100K	5%	1/6W
R223	1-249-441-11	CARBON	100K	5%	1/6W
R224	1-249-417-11	CARBON	1K	5%	1/6W
R225	1-249-435-11	CARBON	33K	5%	1/6W
R226	1-247-857-00	CARBON	12K	5%	1/6W
R227	1-247-852-00	CARBON	7.5K	5%	1/6W
R228	1-215-453-00	METAL	22K	1%	1/6W
R229	1-215-453-00	METAL	22K	1%	1/6W
R230	1-249-422-11	CARBON	2.7K	5%	1/6W
R231	1-249-425-11	CARBON	4.7K	5%	1/6W
R232	1-247-887-00	CARBON	220K	5%	1/6W
R233	1-249-429-11	CARBON	10K	5%	1/6W
R234	1-247-859-00	CARBON	15K	5%	1/6W
R235	1-249-441-11	CARBON	100K	5%	1/6W
R236	1-249-429-11	CARBON	10K	5%	1/6W
R241	1-249-433-11	CARBON	22K	5%	1/6W
R242	1-247-903-00	CARBON	1M	5%	1/6W
R243	1-249-429-11	CARBON	10K	5%	1/6W
R244	1-249-429-11	CARBON	10K	5%	1/6W
R245	1-249-433-11	CARBON	22K	5%	1/6W
R246	1-249-435-11	CARBON	33K	5%	1/6W
R247	1-247-839-00	CARBON	2.2K	5%	1/6W
R248	1-247-887-00	CARBON	220K	5%	1/6W
R249	1-247-887-00	CARBON	220K	5%	1/6W
R250	1-247-891-00	CARBON	330K	5%	1/6W
R251	1-247-873-00	CARBON	56K	5%	1/6W
R252	1-249-439-11	CARBON	68K	5%	1/6W
R253	1-247-859-00	CARBON	15K	5%	1/6W
R254	1-247-903-00	CARBON	1M	5%	1/6W
R255	1-249-429-11	CARBON	10K	5%	1/6W
R256	1-247-846-00	CARBON	4.3K	5%	1/6W
R257	1-247-822-00	CARBON	430	5%	1/6W
R258	1-249-425-11	CARBON	4.7K	5%	1/6W
R259	1-247-869-00	CARBON	39K	5%	1/6W
R260	1-247-869-00	CARBON	39K	5%	1/6W

ELECTRICAL PARTS

Ref.No.	Part No.	Description			
R261	1-247-838-00	CARBON	2K	5%	1/6W
R262	1-249-405-11	CARBON	100	5%	1/6W
R263	1-247-838-00	CARBON	2K	5%	1/6W
R264	1-249-405-11	CARBON	100	5%	1/6W
R265	1-249-405-11	CARBON	100	5%	1/6W
R267	1-249-441-11	CARBON	100K	5%	1/6W
R268	1-247-853-00	CARBON	8.2K	5%	1/6W
R269	1-249-435-11	CARBON	33K	5%	1/6W
R270	1-249-422-11	CARBON	2.7K	5%	1/6W
R271	1-249-429-11	CARBON	10K	5%	1/6W
R272	1-249-439-11	CARBON	68K	5%	1/6W
R273	1-249-429-11	CARBON	10K	5%	1/6W
R274	1-249-429-11	CARBON	10K	5%	1/6W
R275	1-249-429-11	CARBON	10K	5%	1/6W
R276	1-249-429-11	CARBON	10K	5%	1/6W
R277	1-249-429-11	CARBON	10K	5%	1/6W
R278	1-249-429-11	CARBON	10K	5%	1/6W
R279	1-247-864-00	CARBON	24K	5%	1/6W
R280	1-249-433-11	CARBON	22K	5%	1/6W
R281	1-249-429-11	CARBON	10K	5%	1/6W
R282	1-249-440-11	CARBON	82K	5%	1/6W
R283	1-247-838-00	CARBON	2K	5%	1/6W
R285	1-249-429-11	CARBON	10K	5%	1/6W
R286	1-249-429-11	CARBON	10K	5%	1/6W
R287	1-249-429-11	CARBON	10K	5%	1/6W
R288	1-247-889-00	CARBON	270K	5%	1/6W
R289	1-247-895-00	CARBON	470K	5%	1/6W
R290	1-249-429-11	CARBON	10K	5%	1/6W
R291	1-249-429-11	CARBON	10K	5%	1/6W
R292	1-249-429-11	CARBON	10K	5%	1/6W
R293	1-249-429-11	CARBON	10K	5%	1/6W
R294	1-249-429-11	CARBON	10K	5%	1/6W
R295	1-249-429-11	CARBON	10K	5%	1/6W
R296	1-249-417-11	CARBON	1K	5%	1/6W
R297	1-249-417-11	CARBON	1K	5%	1/6W
R298	1-249-429-11	CARBON	10K	5%	1/6W
R299	1-249-429-11	CARBON	10K	5%	1/6W
R300	1-249-429-11	CARBON	10K	5%	1/6W
R301	1-249-429-11	CARBON	10K	5%	1/6W
R302	1-249-429-11	CARBON	10K	5%	1/6W
R303	1-249-429-11	CARBON	10K	5%	1/6W
R304	1-249-429-11	CARBON	10K	5%	1/6W
R305	1-249-429-11	CARBON	10K	5%	1/6W
R306	1-249-429-11	CARBON	10K	5%	1/6W
R307	1-249-429-11	CARBON	10K	5%	1/6W
R308	1-249-429-11	CARBON	10K	5%	1/6W
R309	1-249-429-11	CARBON	10K	5%	1/6W
R310	1-249-441-11	CARBON	100K	5%	1/6W
R311	1-249-429-11	CARBON	10K	5%	1/6W
R312	1-249-429-11	CARBON	10K	5%	1/6W
R313	1-249-429-11	CARBON	10K	5%	1/6W
R314	1-249-429-11	CARBON	10K	5%	1/6W
R315	1-249-417-11	CARBON	1K	5%	1/6W
R316	1-249-429-11	CARBON	10K	5%	1/6W
R317	1-249-417-11	CARBON	1K	5%	1/6W
R318	1-249-429-11	CARBON	10K	5%	1/6W
R319	1-249-433-11	CARBON	22K	5%	1/6W

ELECTRICAL PARTS

Ref.No.	Part No.	Description			
R320	1-249-433-11	CARBON	22K	5%	1/6W
R321	1-249-417-11	CARBON	1K	5%	1/6W
R322	1-249-429-11	CARBON	10K	5%	1/6W
R323	1-249-417-11	CARBON	1K	5%	1/6W
R331	1-247-725-11	CARBON	10K		1/4W
R332	1-247-723-11	CARBON	6.8K		1/4W
R333	1-247-704-11	CARBON	220		1/4W
R334	1-247-721-11	CARBON	4.7K		1/4W
R335	1-247-719-11	CARBON	3.3K		1/4W
R337	1-249-497-11	CARBON	33K		1/4W
R338	1-247-712-11	CARBON	820		1/4W
R341	1-249-417-11	CARBON	1K	5%	1/6W
R342	1-247-700-11	CARBON	100		1/4W
R351	1-247-712-11	CARBON	820		1/4W
R352	1-249-435-11	CARBON	33K	5%	1/6W
R353	1-249-434-11	CARBON	27K	5%	1/6W
R354	1-249-425-11	CARBON	4.7K	5%	1/6W
R355	1-247-869-00	CARBON	39K	5%	1/6W
R356	1-247-815-00	CARBON	220	5%	1/6W
R362	1-247-723-11	CARBON	6.8K		1/4W
R363	1-249-542-11	CARBON	390		1/4W
R364	1-247-721-11	CARBON	4.7K		1/4W
R365	1-247-719-11	CARBON	3.3K		1/4W
R367	1-249-497-11	CARBON	33K		1/4W
R368	1-247-712-11	CARBON	820		1/4W
R371	1-249-417-11	CARBON	1K	5%	1/6W
R372	1-247-700-11	CARBON	100		1/4W
R381	1-247-712-11	CARBON	820		1/4W
R382	1-249-435-11	CARBON	33K	5%	1/6W
R383	1-249-434-11	CARBON	27K	5%	1/6W
R384	1-249-425-11	CARBON	4.7K	5%	1/6W
R385	1-247-869-00	CARBON	39K	5%	1/6W
R386	1-247-815-00	CARBON	220	5%	1/6W
R392	1-249-441-11	CARBON	100K	5%	1/6W
R401	1-247-815-00	CARBON	220	5%	1/6W
R402	1-247-815-00	CARBON MELF	220	5%	1/5W
R403	1-247-887-00	CARBON	220K	5%	1/6W
R404	1-249-433-11	CARBON	22K	5%	1/6W
R405	1-247-839-00	CARBON	2.2K	5%	1/6W
R406	1-247-903-00	CARBON	1M	5%	1/6W
R407	1-249-417-11	CARBON	1K	5%	1/6W
R408	1-249-433-11	CARBON	22K	5%	1/6W
R409	1-247-870-00	CARBON	43K	5%	1/6W
R410	1-247-895-00	CARBON	470K	5%	1/6W
R411	1-247-783-00	CARBON	10	5%	1/6W
R412	1-247-783-00	CARBON	10	5%	1/6W
R413	1-247-815-00	CARBON	220	5%	1/6W
R415	1-249-417-11	CARBON	1K	5%	1/6W
R416	1-247-903-00	CARBON	1M	5%	1/6W
R417	1-247-903-00	CARBON	1M	5%	1/6W
R418	1-247-839-00	CARBON	2.2K	5%	1/6W
R419	1-249-414-11	CARBON	560	5%	1/6W
R420	1-247-845-00	CARBON	3.9K	5%	1/6W
R421	1-249-429-11	CARBON	10K	5%	1/6W
R422	1-247-873-00	CARBON	56K	5%	1/6W
R423	1-249-429-11	CARBON	10K	5%	1/6W
R424	1-249-441-11	CARBON	100K	5%	1/6W

ELECTRICAL PARTS

Ref.No.	Part No.	Description			
R425	1-249-429-11	CARBON	10K	5%	1/6W
R426	1-249-441-11	CARBON	100K	5%	1/6W
R427	1-247-884-00	CARBON	160K	5%	1/6W
R428	1-247-888-00	CARBON	240K	5%	1/6W
R429	1-249-429-11	CARBON	10K	5%	1/6W
R430	1-249-429-11	CARBON	10K	5%	1/6W
R431	1-249-429-11	CARBON	10K	5%	1/6W
R432	1-249-441-11	CARBON	100K	5%	1/6W
R433	1-249-441-11	CARBON	100K	5%	1/6W
R434	1-247-889-00	CARBON	270K	5%	1/6W
R435	1-247-893-00	CARBON	390K	5%	1/6W
R501	1-247-903-00	CARBON	1M	5%	1/6W
R502	1-249-417-11	CARBON	1K	5%	1/6W
R503	1-249-433-11	CARBON	22K	5%	1/6W
R504	1-247-839-00	CARBON	2.2K	5%	1/6W
R505	1-247-815-00	CARBON	220	5%	1/6W
R506	1-247-815-00	CARBON	220	5%	1/6W
R507	1-247-817-00	CARBON	270	5%	1/6W
R508	1-247-817-00	CARBON	270	5%	1/6W
R509	1-247-817-00	CARBON	270	5%	1/6W
R510	1-247-815-00	CARBON	220	5%	1/6W
R511	1-249-433-11	CARBON	22K	5%	1/6W
R512	1-249-433-11	CARBON	22K	5%	1/6W
R513	1-249-429-11	CARBON	10K	5%	1/6W
R514	1-247-817-00	CARBON	270	5%	1/6W
R515	1-249-429-11	CARBON	10K	5%	1/6W
R516	1-247-815-00	CARBON	220	5%	1/6W
R517	1-247-815-00	CARBON	220	5%	1/6W
R518	1-249-429-11	CARBON	10K	5%	1/6W
R519	1-247-817-00	CARBON	270	5%	1/6W
RV201	1-237-191-11	RES, ADJ, CARBON 2K			
RV202	1-237-193-11	RES, ADJ, CARBON 10K			
RV203	1-237-194-11	RES, ADJ, CARBON 20K			
RV399	1-230-208-00	RES, VAR, CARBON 20K/20K			
RV401	1-237-450-11	RES, ADJ, CARBON 200K			
RV402	1-237-450-11	RES, ADJ, CARBON 200K			
RV403	1-237-449-11	RES, ADJ, CARBON 100K			
S401	1-570-503-11	SWITCH, MICRO			
S402	1-570-502-11	SWITCH, MICRO			
S403	1-570-504-11	SWITCH, MICRO			
S404	1-570-504-11	SWITCH, MICRO			
S405	1-570-504-11	SWITCH, MICRO			
S406	1-570-504-11	SWITCH, MICRO			
S407	1-570-504-11	SWITCH, MICRO			
S408	1-570-886-11	SWITCH, MICRO			
S501	1-570-876-11	SWITCH, KEY BOARD			
S502	1-570-876-11	SWITCH, KEY BOARD			
S503	1-570-876-11	SWITCH, KEY BOARD			
S504	1-570-876-11	SWITCH, KEY BOARD			
S505	1-570-876-11	SWITCH, KEY BOARD			
S506	1-570-876-11	SWITCH, KEY BOARD			
S507	1-570-876-11	SWITCH, KEY BOARD			
S508	1-554-419-00	SWITCH, PUSH (1 KEY)			
S551	1-570-876-11	SWITCH, KEY BOARD			
S552	1-570-876-11	SWITCH, KEY BOARD			
S553	1-570-876-11	SWITCH, KEY BOARD			
S554	1-570-876-11	SWITCH, KEY BOARD			
S555	1-570-876-11	SWITCH, KEY BOARD			
S556	1-570-876-11	SWITCH, KEY BOARD			

ELECTRICAL PARTS

Ref.No.	Part No.	Description
S557	1-570-876-11	SWITCH, KEY BOARD
S558	1-570-876-11	SWITCH, KEY BOARD
S559	1-570-876-11	SWITCH, KEY BOARD
S560	1-570-876-11	SWITCH, KEY BOARD
S561	1-570-876-11	SWITCH, KEY BOARD
S562	1-570-876-11	SWITCH, KEY BOARD
S563	1-570-876-11	SWITCH, KEY BOARD
S564	1-570-876-11	SWITCH, KEY BOARD
S565	1-570-876-11	SWITCH, KEY BOARD
S566	1-570-876-11	SWITCH, KEY BOARD
S567	1-570-876-11	SWITCH, KEY BOARD
S568	1-570-876-11	SWITCH, KEY BOARD
S569	1-570-876-11	SWITCH, KEY BOARD
S570	1-570-876-11	SWITCH, KEY BOARD
S571	1-570-876-11	SWITCH, KEY BOARD
S572	1-570-876-11	SWITCH, KEY BOARD
S573	1-570-876-11	SWITCH, KEY BOARD
S574	1-570-876-11	SWITCH, KEY BOARD
S575	1-570-876-11	SWITCH, KEY BOARD
S576	1-570-876-11	SWITCH, KEY BOARD
S577	1-570-876-11	SWITCH, KEY BOARD
S578	1-570-876-11	SWITCH, KEY BOARD
S579	1-570-876-11	SWITCH, KEY BOARD
S801	1-553-318-00	SWITCH, PUSH (AC POWER)(1 KEY)
S901	1-552-625-00	SWITCH, SLIDE
S903	1-553-198-00	SWITCH, LEAF (SLED LIMIT)
T901	⚠1-448-724-11	TRANSFORMER, POWER
TP401	*1-560-061-00	PIN, CONNECTOR 3P
TP402	*1-560-060-00	PIN, CONNECTOR 2P
X201	1-567-301-11	OSCILLATOR, CRYSTAL
X202	1-567-170-00	OSCILLATOR, CERAMIC
X501	1-567-170-00	OSCILLATOR, CERAMIC

ACCESSORY & PACKING MATERIAL

Part No.	Description
1-463-794-11	REMOTE COMMANDER
1-558-543-11	CORD, CONNECTION
1-558-787-11	CORD, CONNECTION
2-114-008-01	CASE, MAGAZINE
2-326-445-01	BAG, POLYETHYLENE
3-701-630-00	BAG, POLYETHYLENE
3-703-390-01	INSTRUCTION
3-703-710-41	STICKER, SONY SYMBOL (12)
3-765-647-21	MANUAL, INSTRUCTION
3-765-742-01	MANUAL, INSTRUCTION
4-917-489-01	CUSHION
4-917-490-11	INDIVIDUAL CARTON
4-917-494-01	BATT CASE, COMMANDER
4-917-497-10	CUSHION, PACK DOOR
7-685-103-14	SCREW +P 2X5 TYPE2 NON-SLIT
7-685-105-14	TAPPING +P 2X8 NON-SLIT
A-4675-162-A	MAGAZINE ASSY
X-2114-001-1	HOLDER ASSY, CD BOOKLET

The components identified by shading and mark ⚠ are critical for safety. Replace only with part number specified.

Les composants identifiés par une trame et une marque ⚠ sont critiques pour la sécurité. Ne les remplacer que par une pièce portant le numéro spécifié.

9-952-570-11

Sony Corporation

English
87A0296-1
Printed in Japan
© 1987